

Bushing type CT


RB-63B / RB-63C / RB-63D / RB-63E / RB-63F / RB-63H


- Bushing / Cable through type
- For Metering / Protection
- Indoor use




Type	Ratio	Rated output (VA)	Accuracy class	Insulation level (kV)	Short time current	Frequency	Mass	Applicable standard of production						
								IEC-185	IEC 60044-1 IEC 61869-2					
RB-63B	300 ~ 3000 / 5A , 1A	15	1.0 / 5P10	0.72 / 3 / -	40kA · 1sec.	50Hz 60Hz	19kg	○	○					
RB-63C							23kg							
RB-63D		30					30kg							
RB-63E							35kg							
RB-63F	500 ~ 4000 / 5A , 1A	15										10kg		
RB-63H	300 ~ 4000 / 5A , 1A	30										26kg		

Short time current being subject to more than 25% rated burden connection at secondary side.

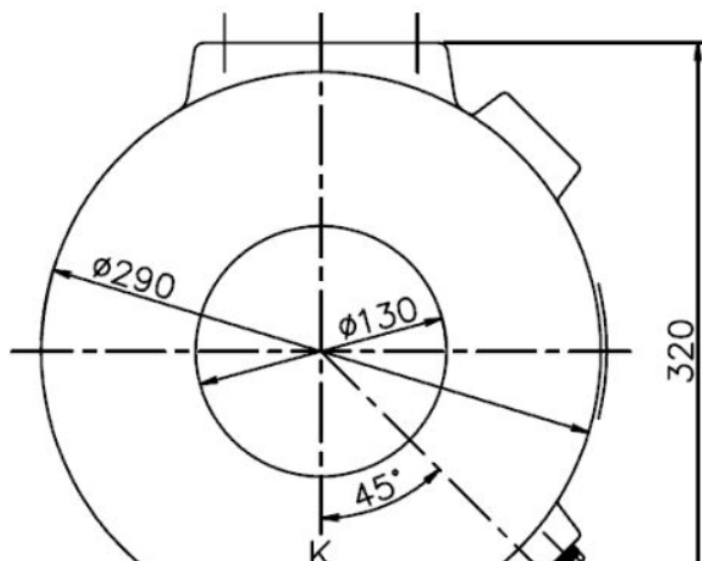


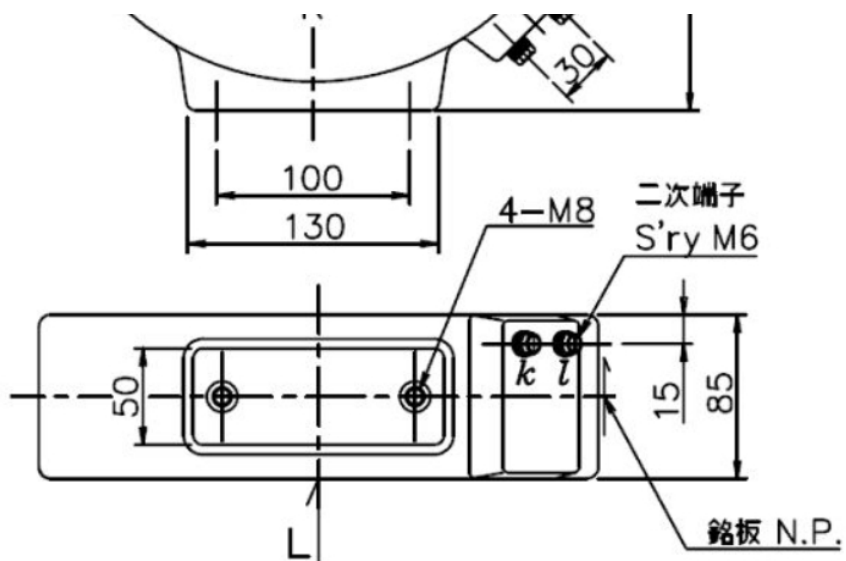


▲RB-63B

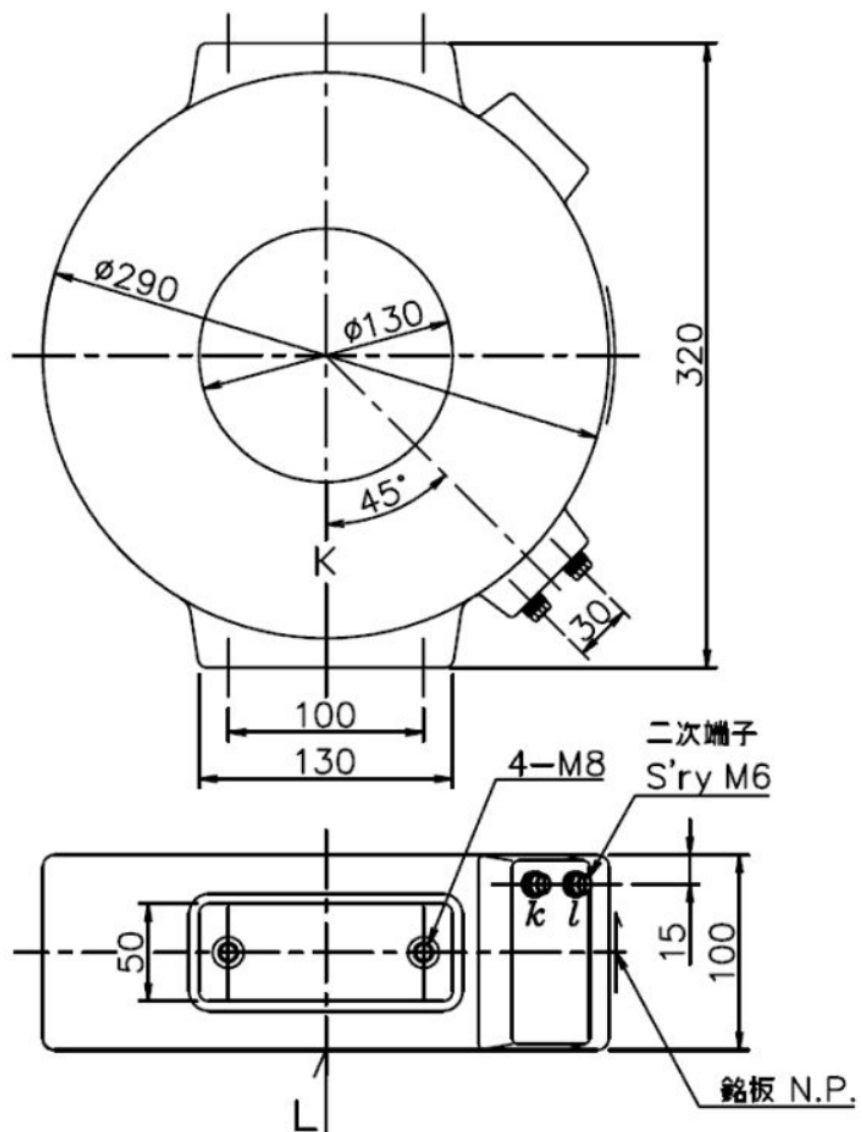


▲RB-63C

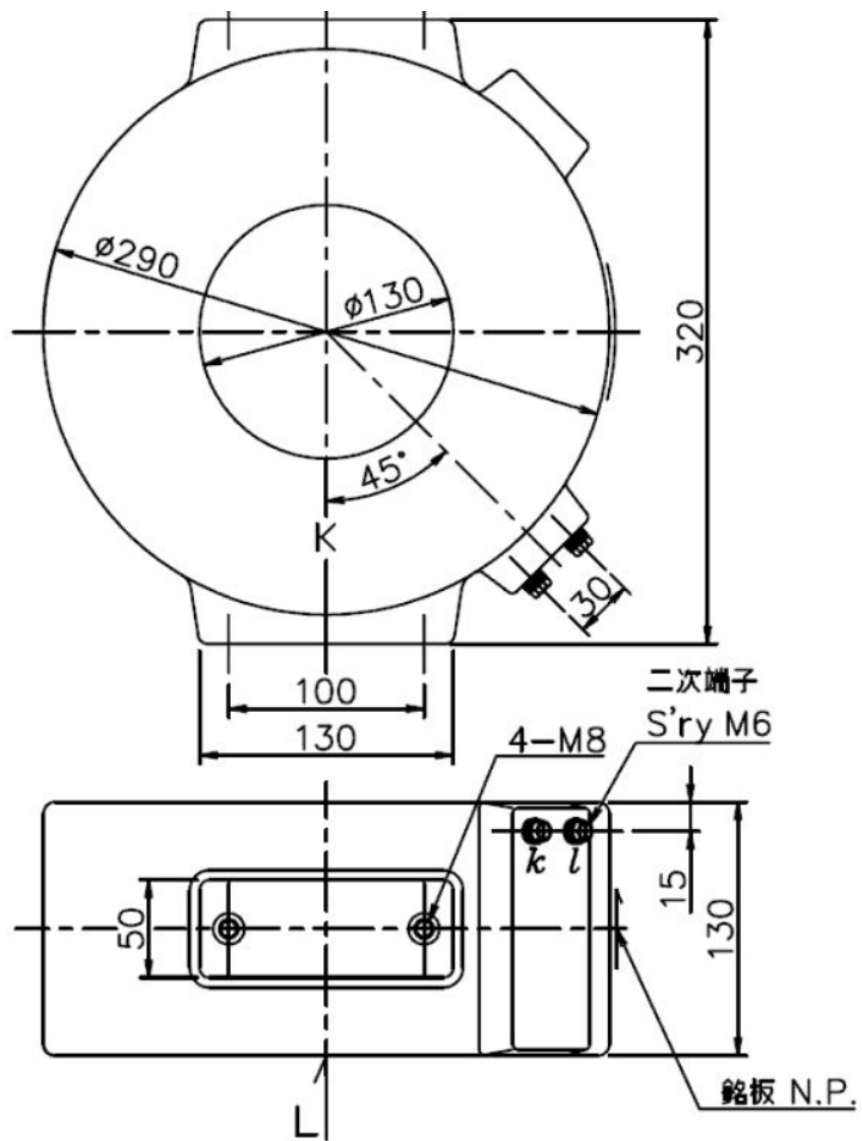


▲RB-63D

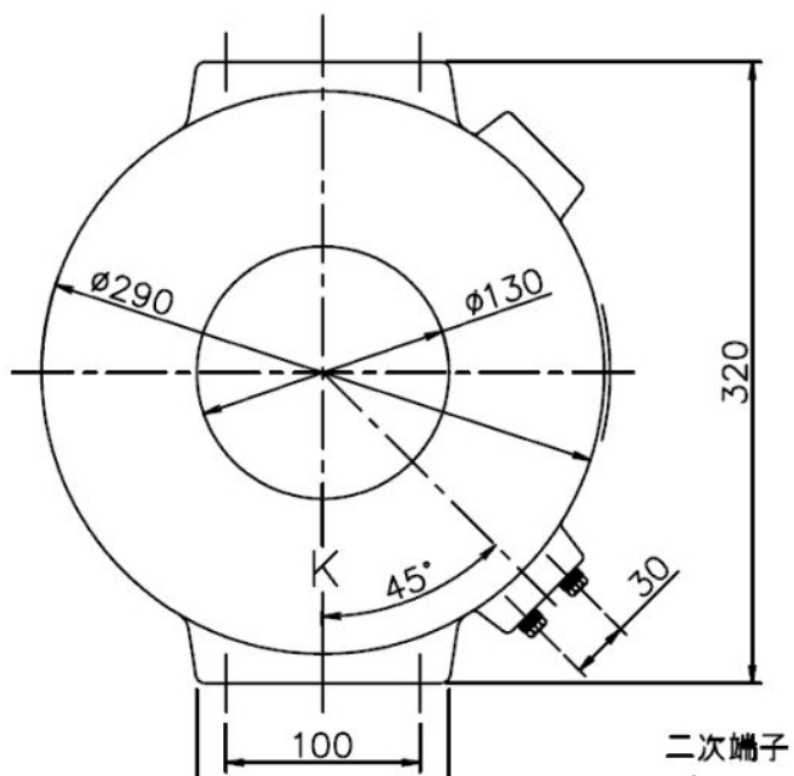


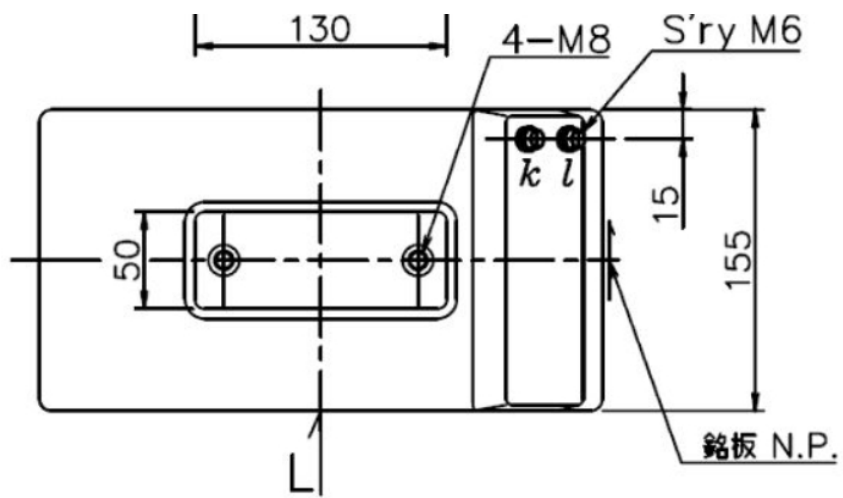


▲RB-63E

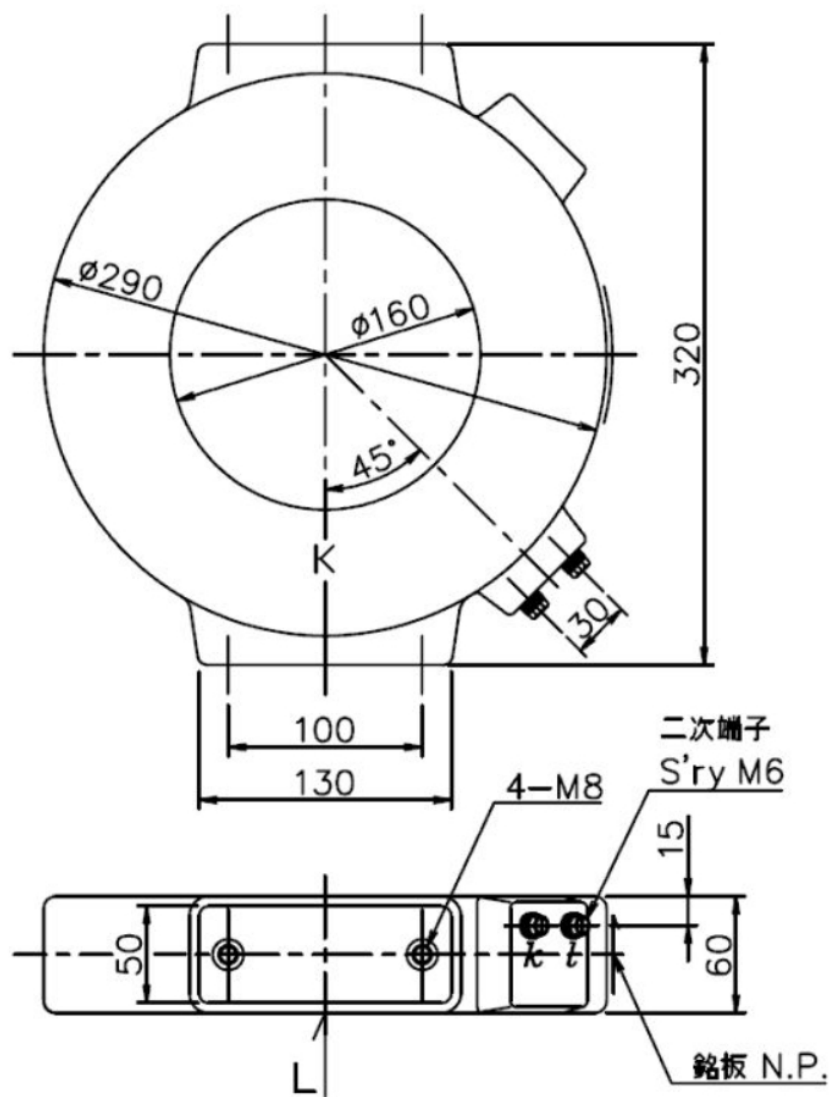

▲RB-63F

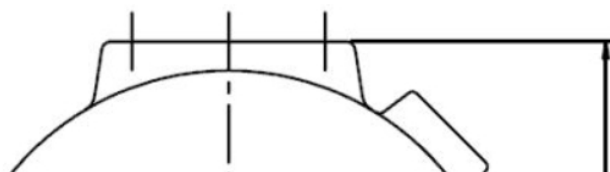

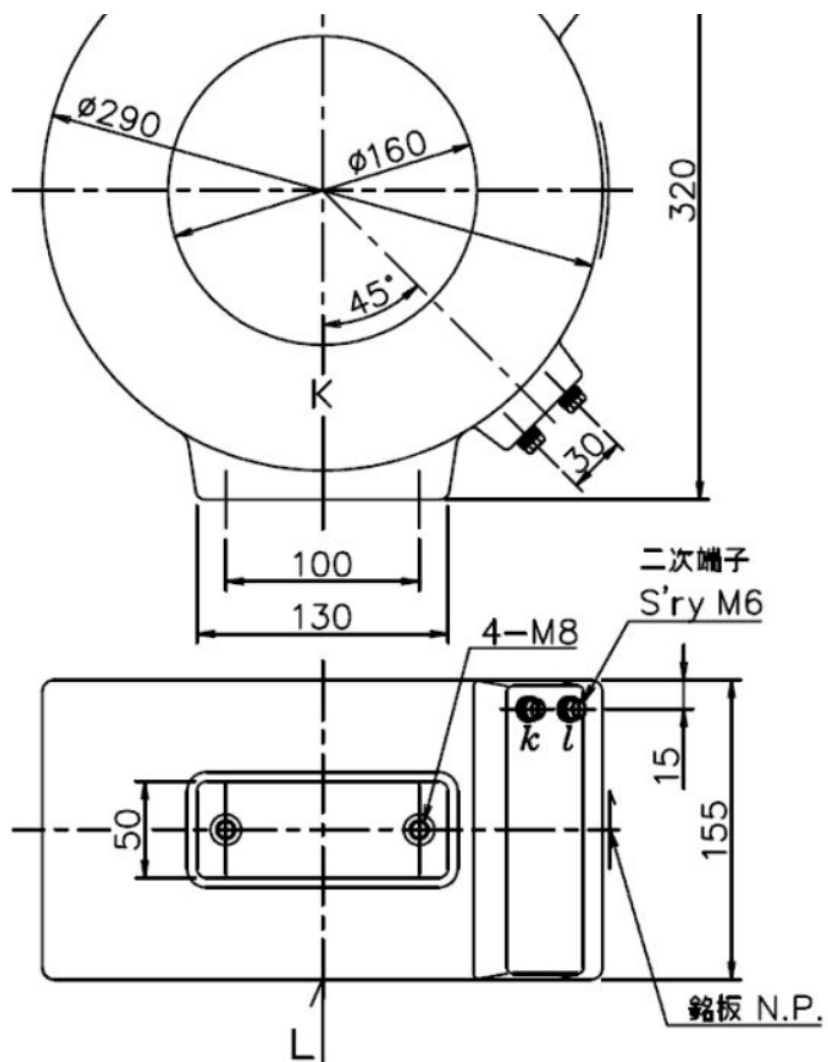

▲RB-63H