

## Rectangular window type CT (1.15kV) ES5-495A / ES5-495B

- Busbar through type
- For Metering / Protection
- Compatible for both Vertical and Horizontal mounting
- Indoor use




▲ ES5-495A




▲ ES5-495B

| Type     | Ratio        | Rated output (VA) | Accuracy class | Insulation level (kV) | Short time current | Frequency    | Mass | Applicable standard of production |                            |
|----------|--------------|-------------------|----------------|-----------------------|--------------------|--------------|------|-----------------------------------|----------------------------|
|          |              |                   |                |                       |                    |              |      | IEC-185                           | IEC 60044-1<br>IEC 61869-2 |
| ES5-495A | 750~1000/5A  | 30                | 1.0 / 5P5      | 0.72 / 3 / -          | 40kA · 1sec.       | 50Hz<br>60Hz | 12kg | ○                                 | ○                          |
| ES5-495B | 1200~6000/5A |                   | 1.0 / 5P10     |                       |                    |              |      |                                   |                            |

Short time current being subject to more than 25% rated burden connection at secondary side.

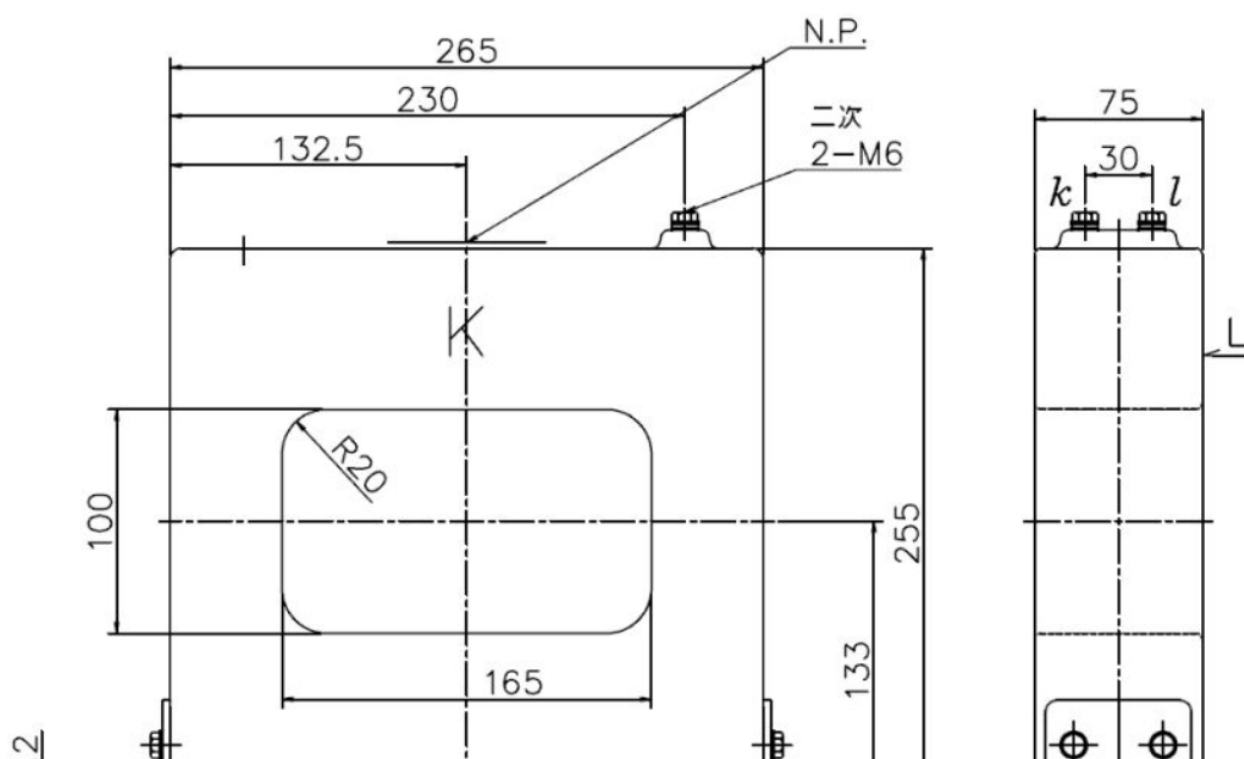



**▲ ES5-495B**

