



-

Short time current being subject to more than 25% rated burden connection at secondary side.
Busbar shall be installed with clearance of more than 8mm from inner wall of through hole

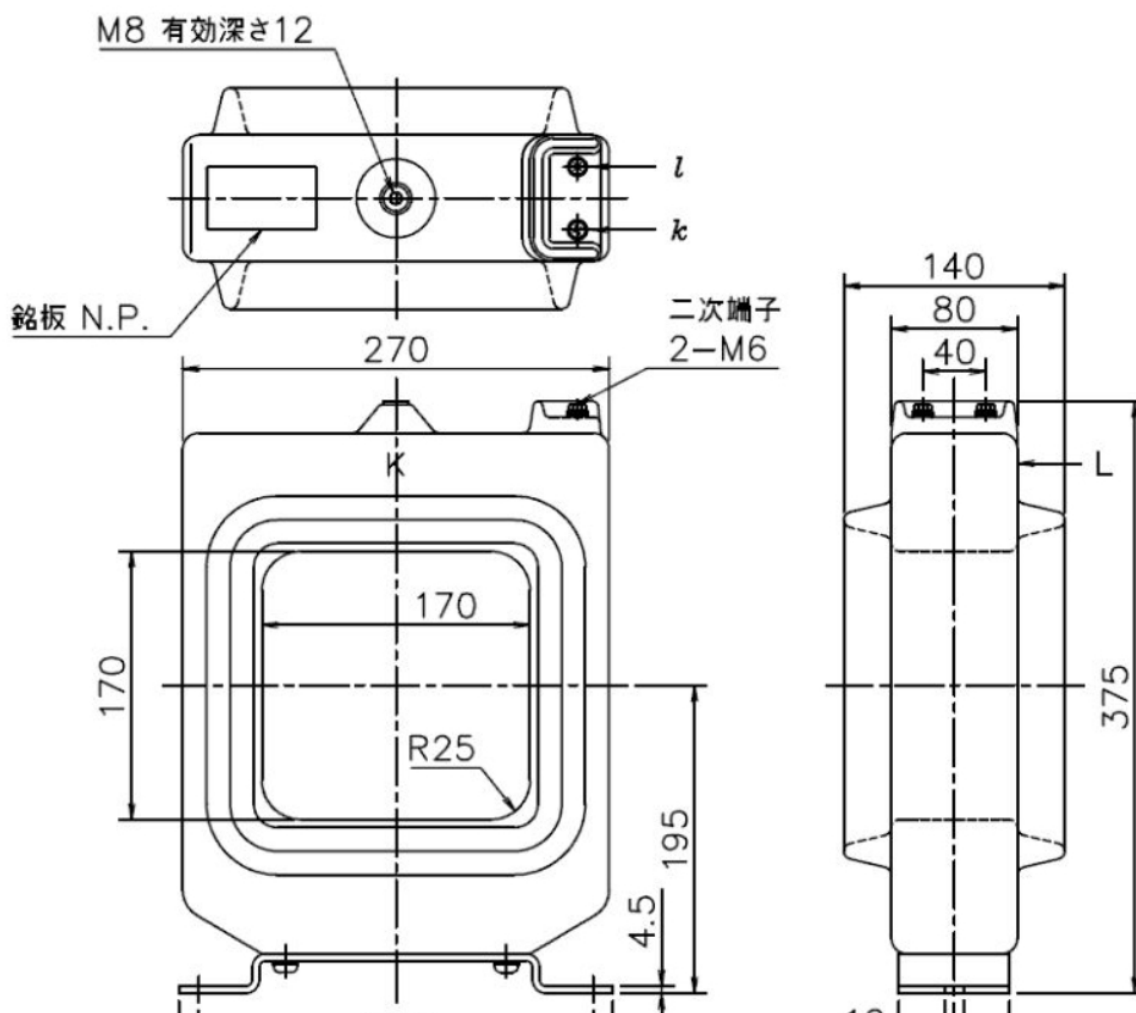



,

