


Round window type CT (1.15kV)


RE-19 / RE-20 / RE-21 / RE-238A / RE-238C / RE-22 / RE-238B / RE-49

- ケーブル、ブスバー貫通形
- 一般計器用、継電器用
- 屋内用




Type	Ratio	Rated output (VA)	Accuracy class	Insulation level (kV)	Frequency	Mass	Applicable standard of production	
							IEC-185	IEC 60044-1 IEC 61869-2
RE-19	300~1500 / 5A , 1A	15	1.0 / 5P10	0.72 / 3 / -	50Hz 60Hz	6kg	○	○
RE-20	200~2000 / 5A , 1A					15kg		
RE-21	200~3000 / 5A , 1A					17kg		
RE-238A	200~3000 / 5A , 1A					28kg		
RE-238C (Double core)	200~3000 / 5+5A , 1+ 1A					57kg		
RE-22	400~4000 / 5A , 1A	30				25kg		
RE-238B	500~4000 / 5A , 1A					26kg		
RE-49	300~4000 / 5A , 1A					41kg		


Installable as Bushing-type CT with insulation cable

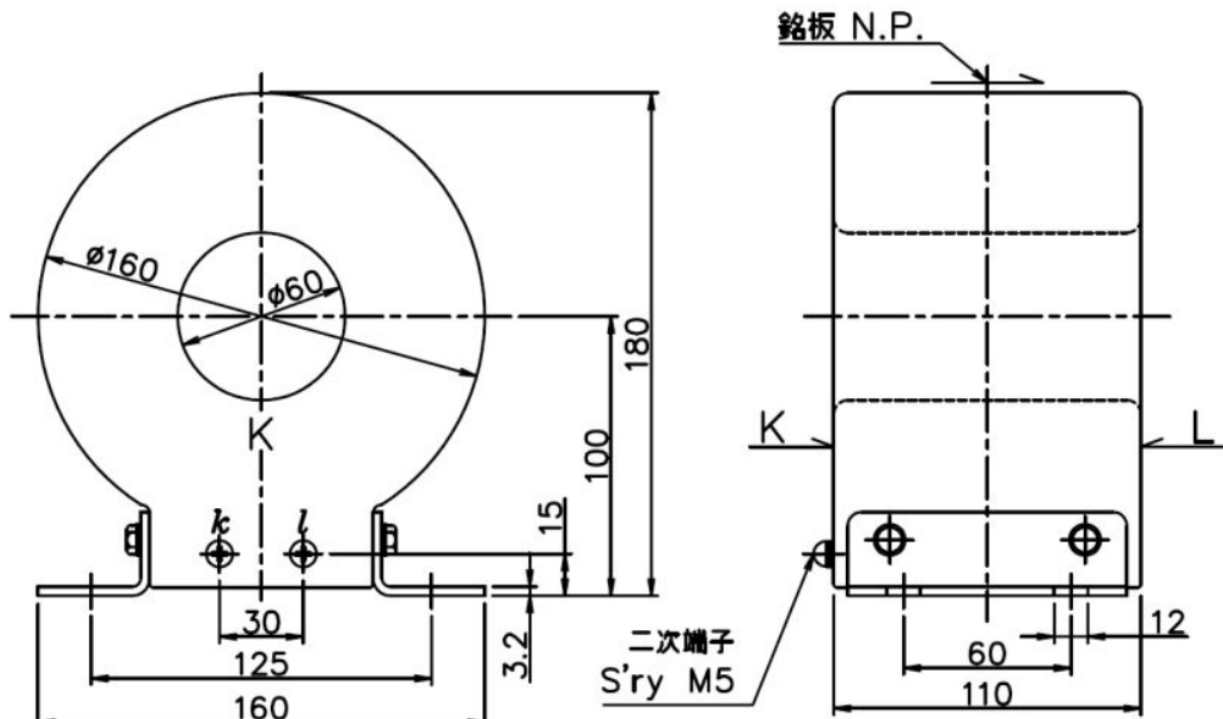


▲RE-19

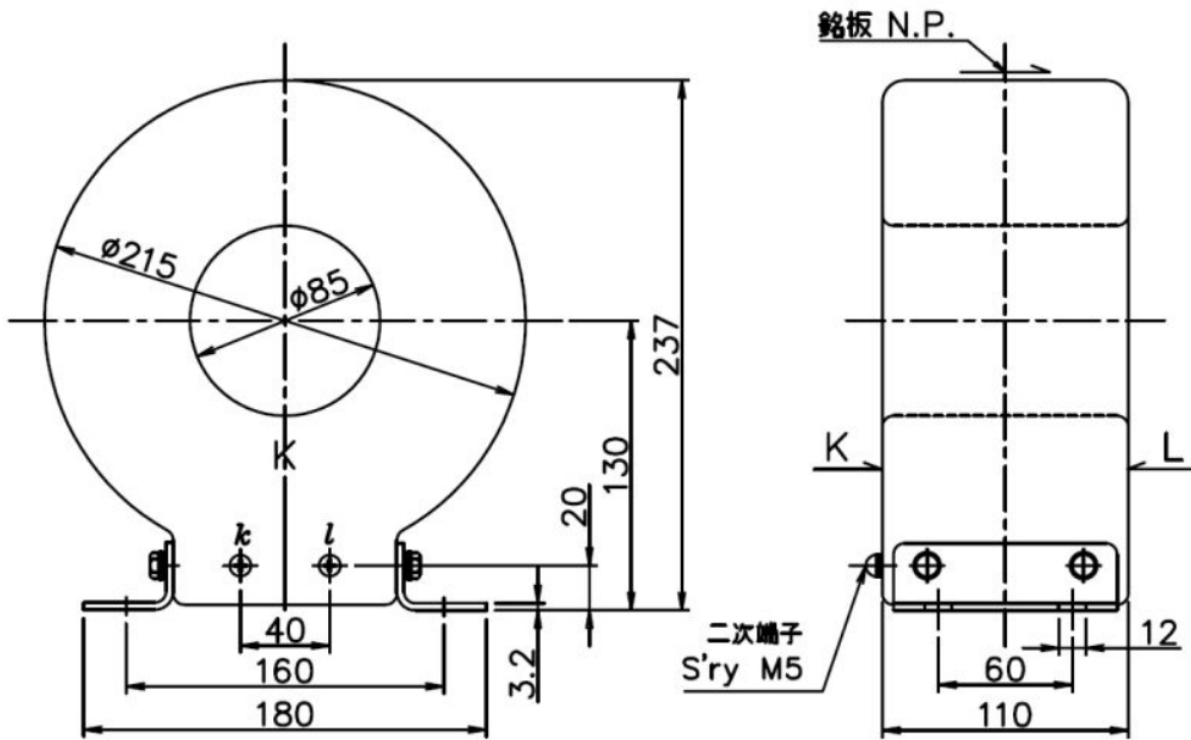


▲RE-20

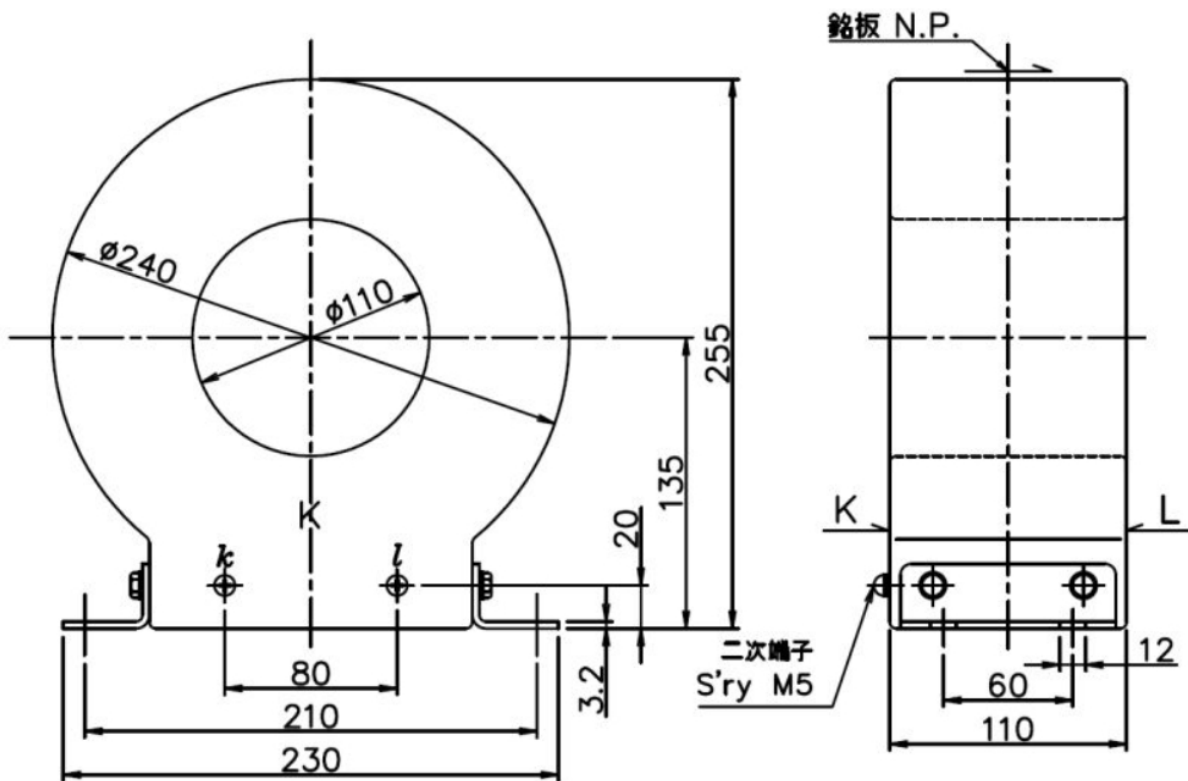


▲RE-21

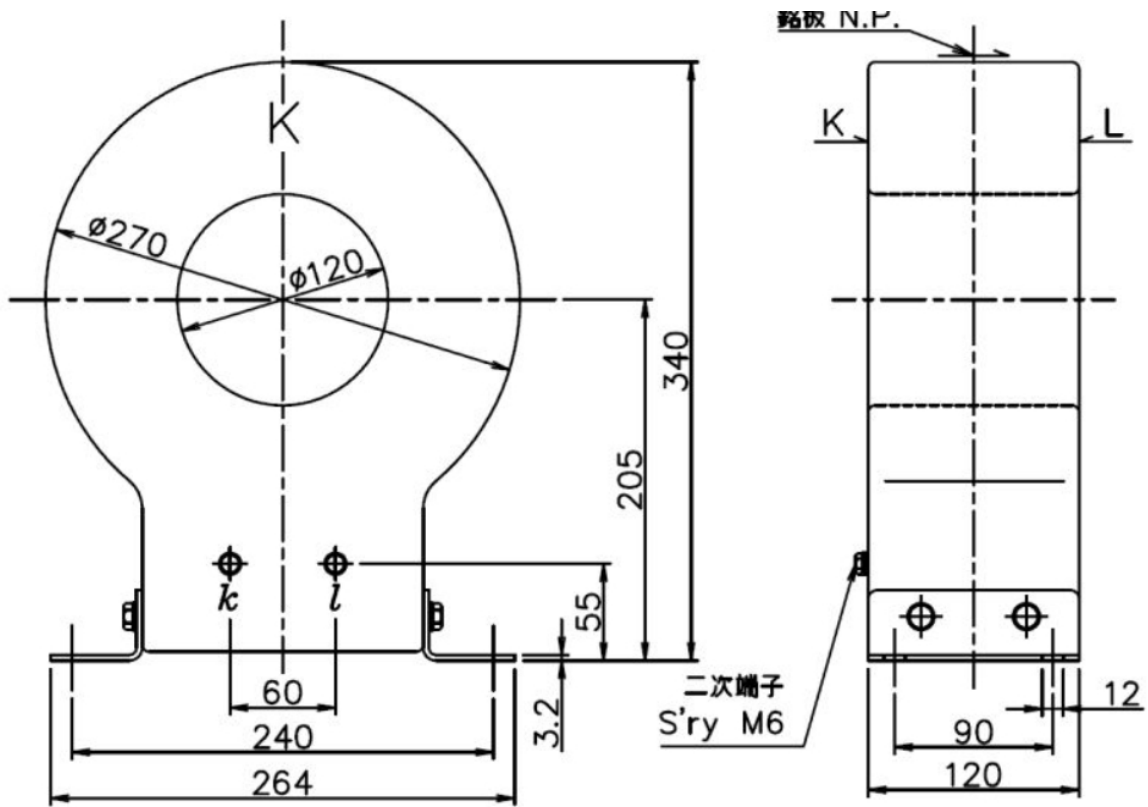


▲RE-238A

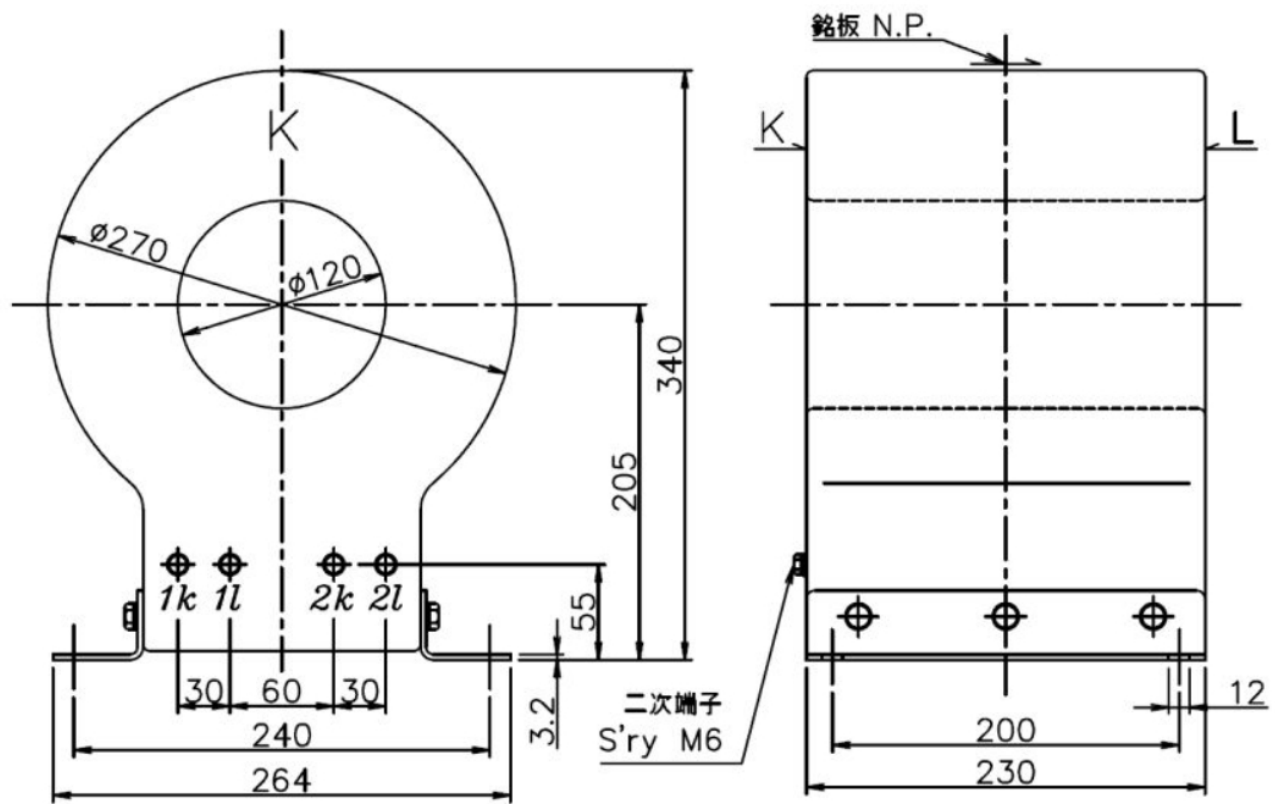


▲RE-238C

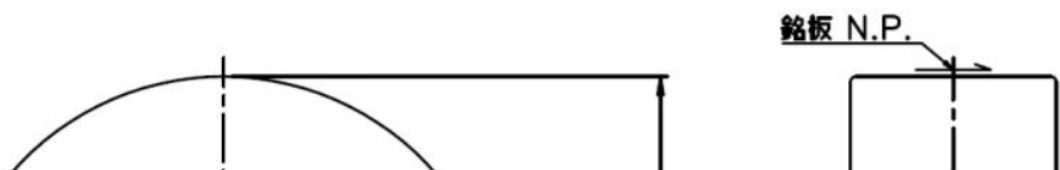


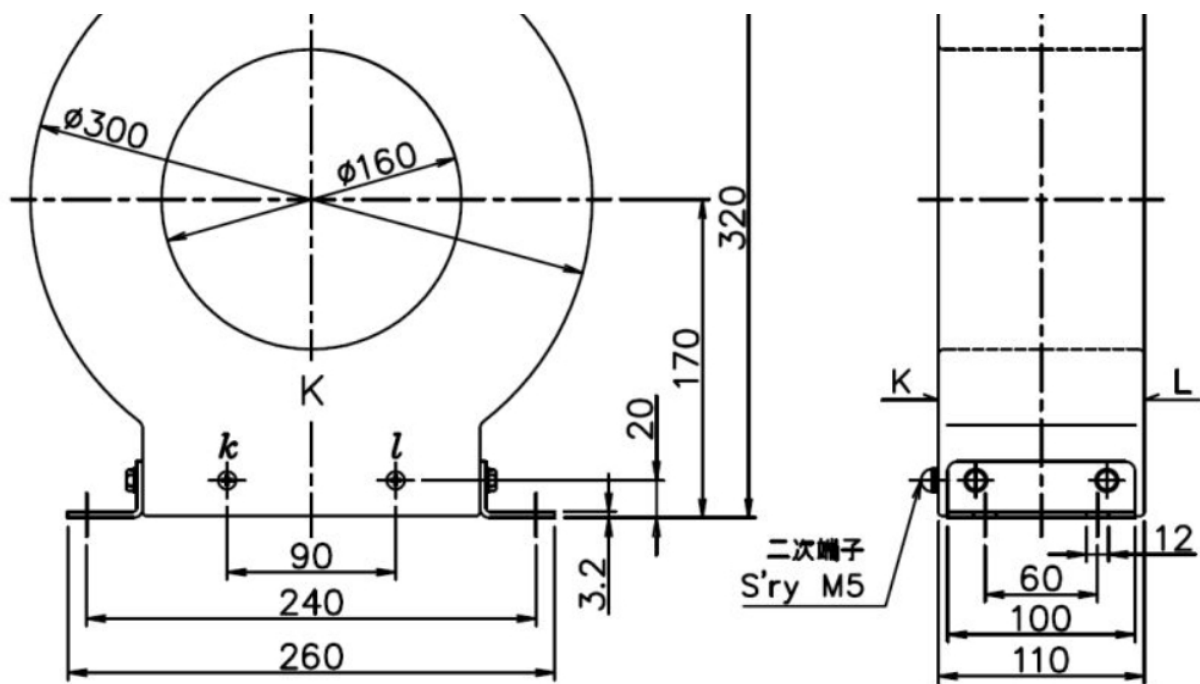


▲RE-22

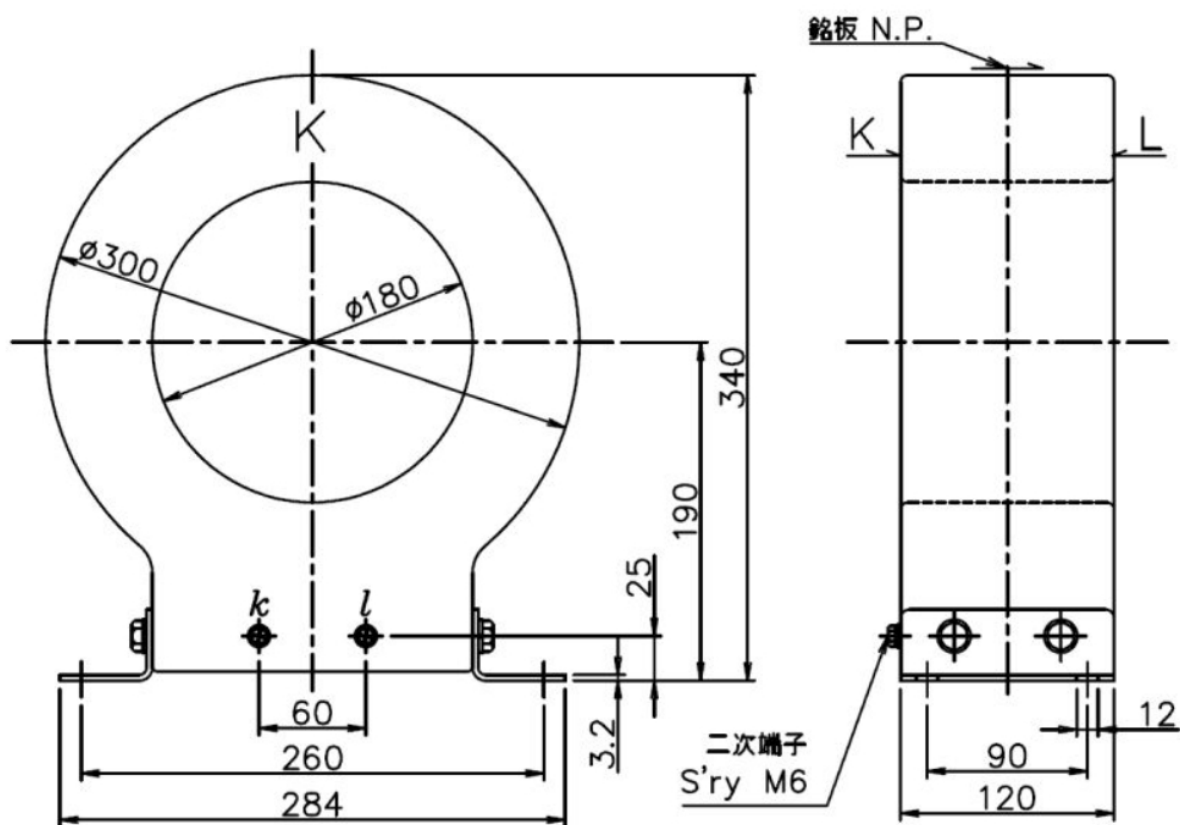

▲RE-238B

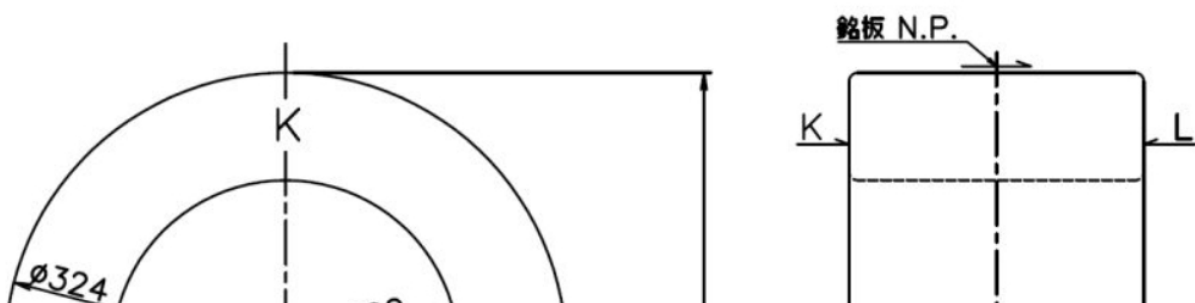

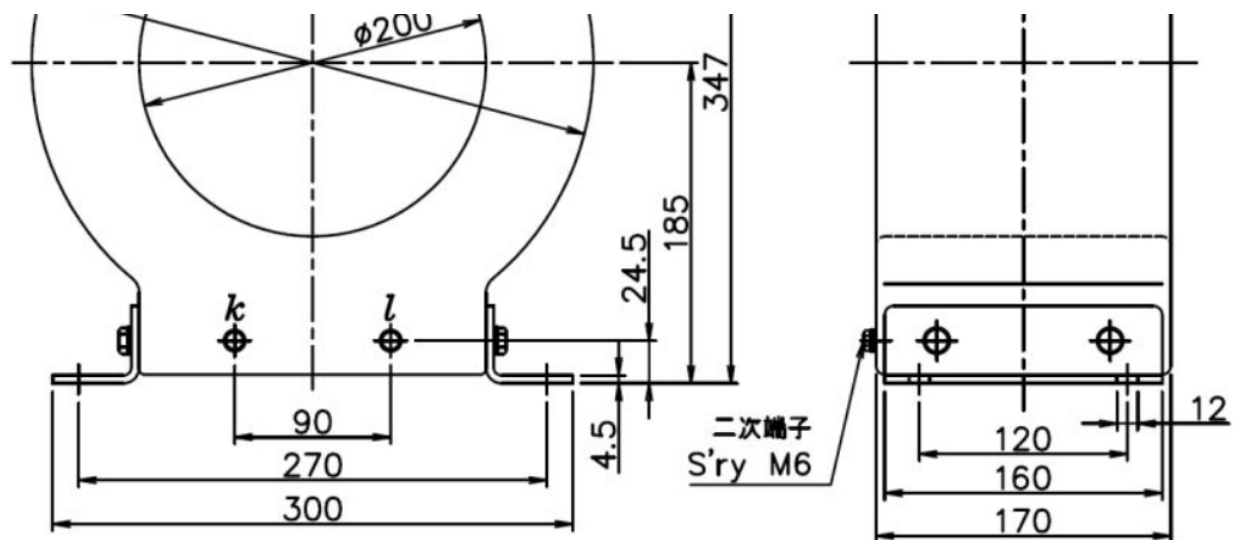

▲RE-49