



Round window type CT (12kV) ER-48 / ER-80

- Cable / Busbar through type
- For metering
- Indoor use





Type	Ratio	Rated output (VA)	Accuracy class	Insulation level (kV)	Short time current	Frequency	Applicable standard of production	
							IEC-185	IEC 60044-1 IEC 61869-2
ER-48	100 ~ 200 / 5A, 1A	30	3 / 10P10	12 / 28 / 75	40kA · 1sec.	50Hz 60Hz	○	○
	300 ~ 4000 / 5A, 1A		1.0 / 5P10					
ER-80	5000 ~ 6000 / 5A, 1A							

Short time current being subject to more than 25% rated burden connection at secondary side.


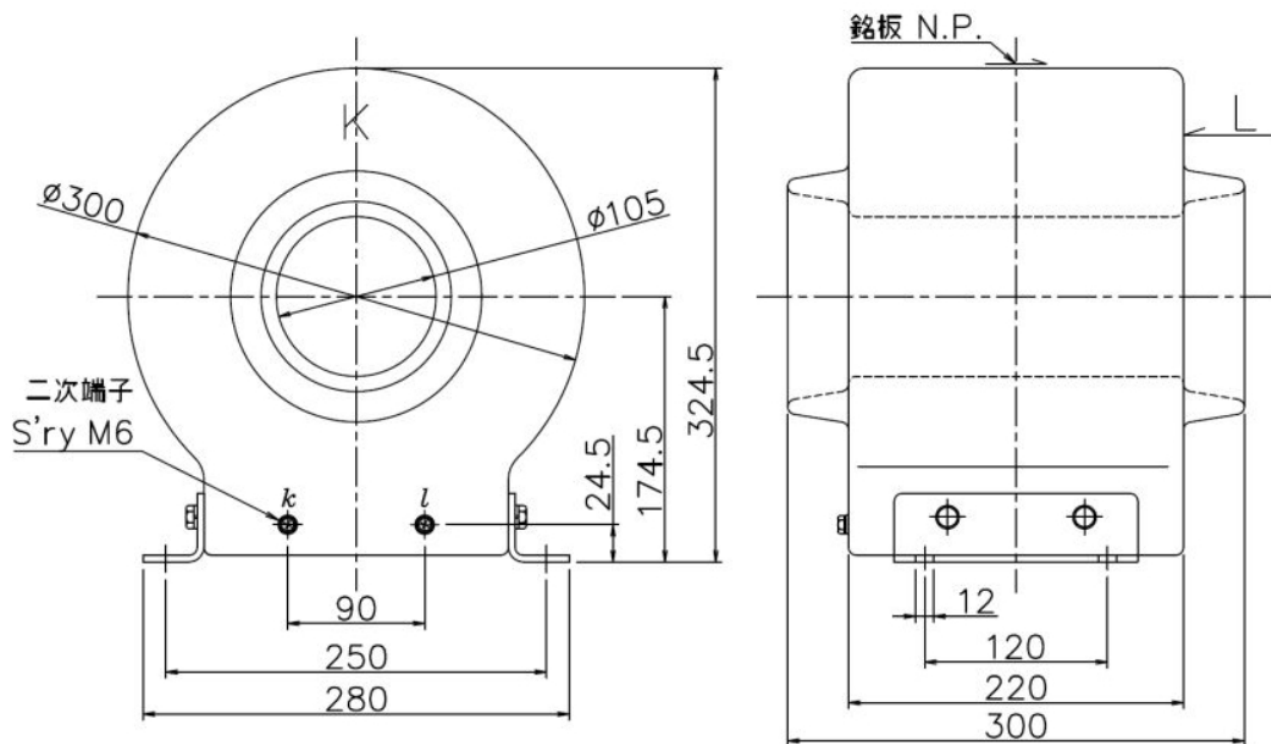


▲ER-48 100~200/5A,1A





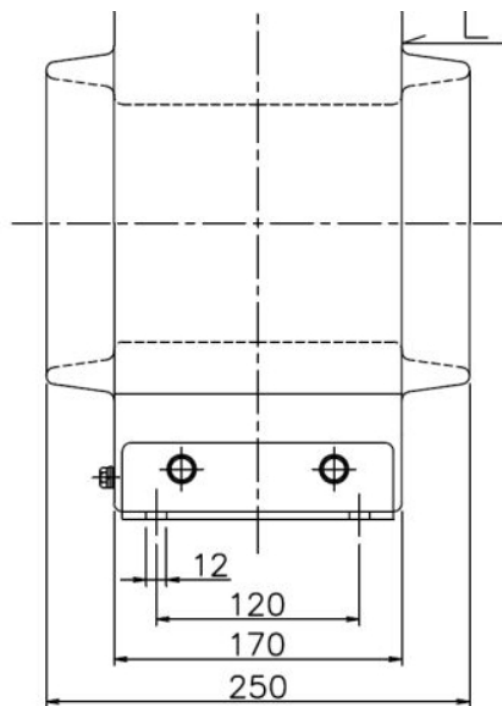
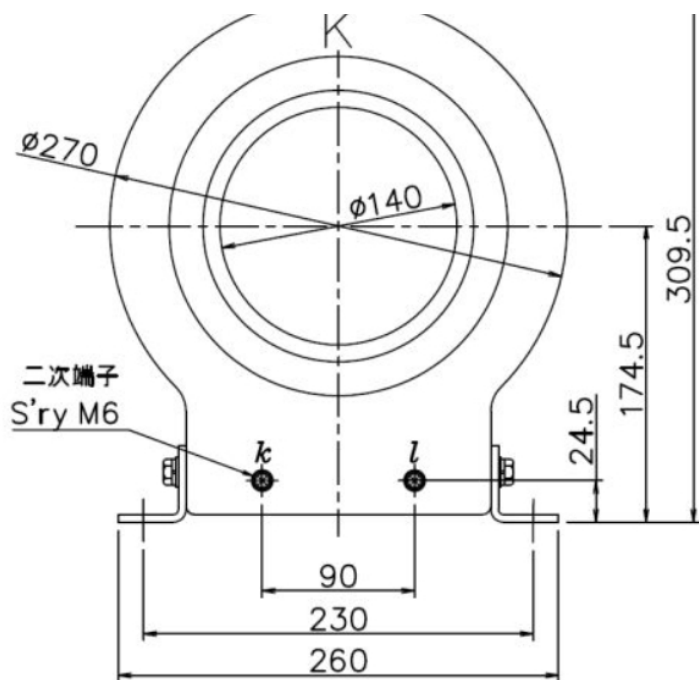


▲ER-48 300/5A,1A

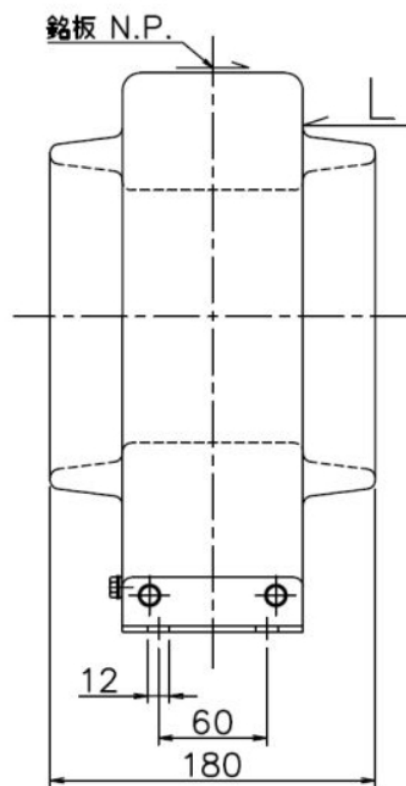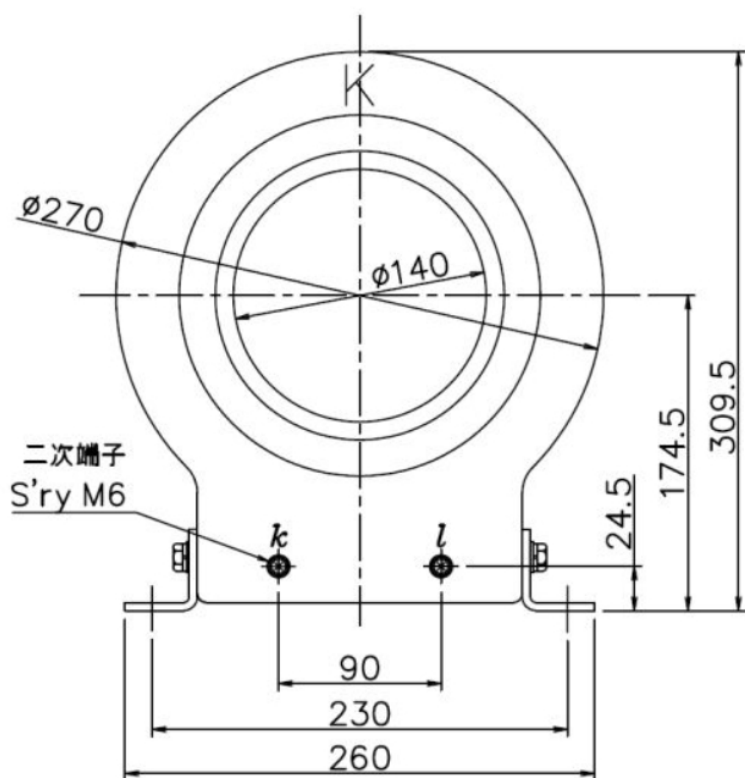

▲ER-48 400~4000/5A,1A

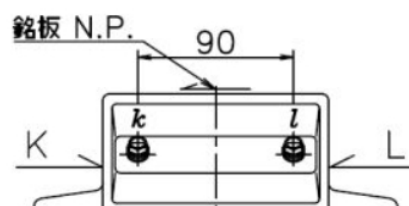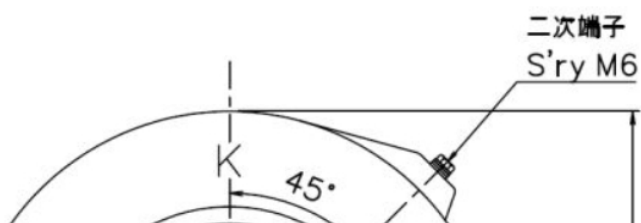

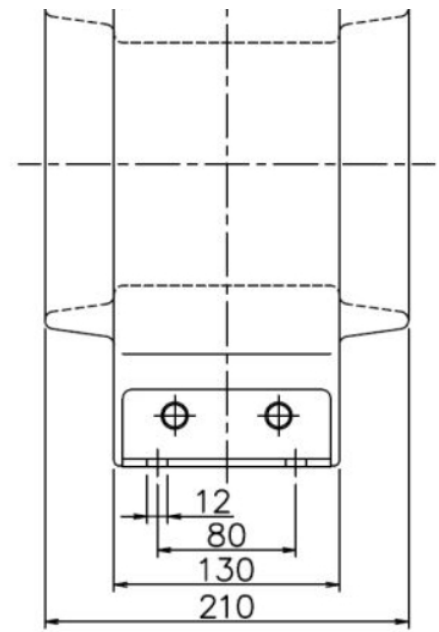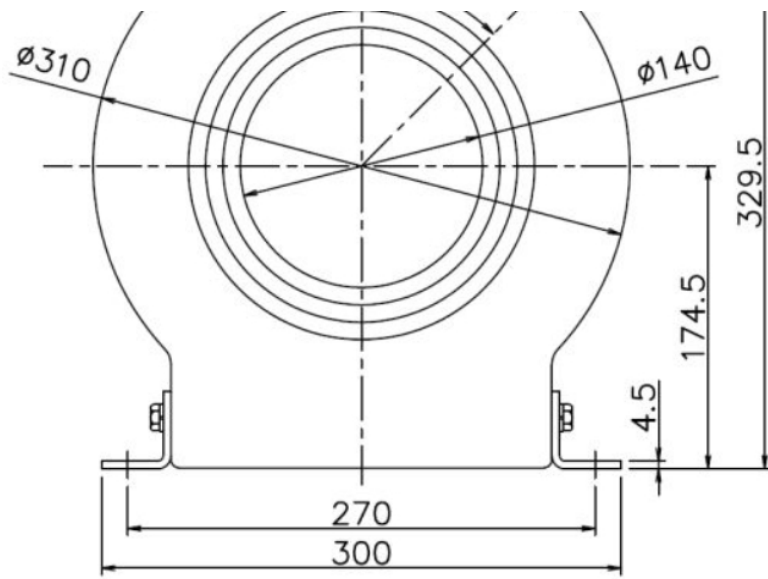

▲ER-80