

Round window type CT (12kV) ER—500 / ER—501

- Busbar through type
- For Metering / Protection
- Indoor use

Ruake resistance upto 2G (30Hz)




▲ER-500




▲ER-501


Type	Ratio	Rated output (VA)	Accuracy class	Insulation level (kV)	Short time current	Frequency	Mass	Applicable standard of production	
								IEC-185	IEC 60044-1 IEC 61869-2
ER-500	2000 ~ 6000 / 5A, 1A	30	1.0 / 5P10	12 / 28 / 75	40kA · 1sec.	50Hz 60Hz	12kg	○	○
ER-501									

Short time current being subject to more than 25% rated burden connection at secondary side.
Busbar shall be installed with clearance of more than 13mm from inner wall of through hole.

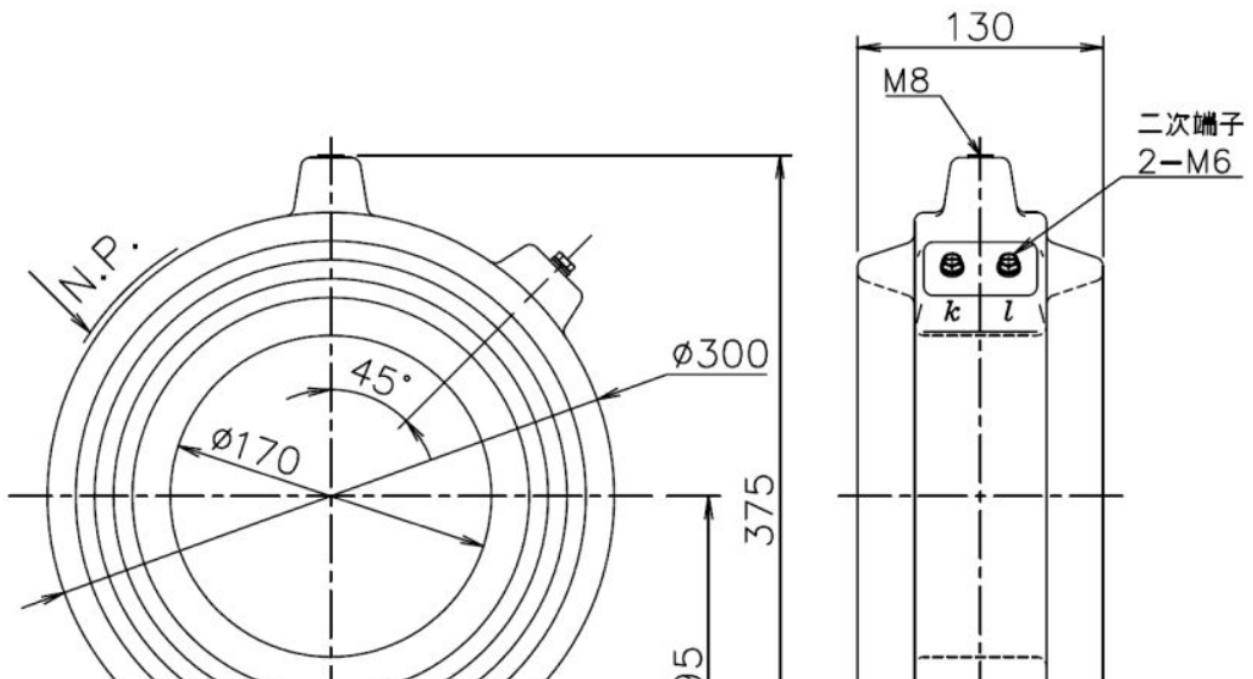

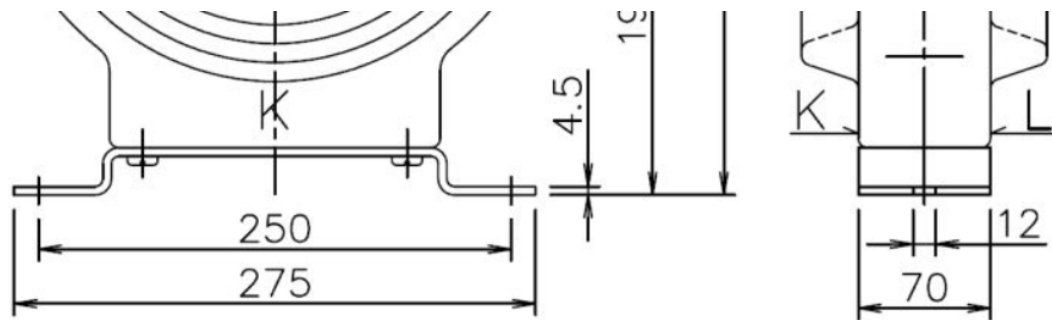

▲ E R - 5 0 0

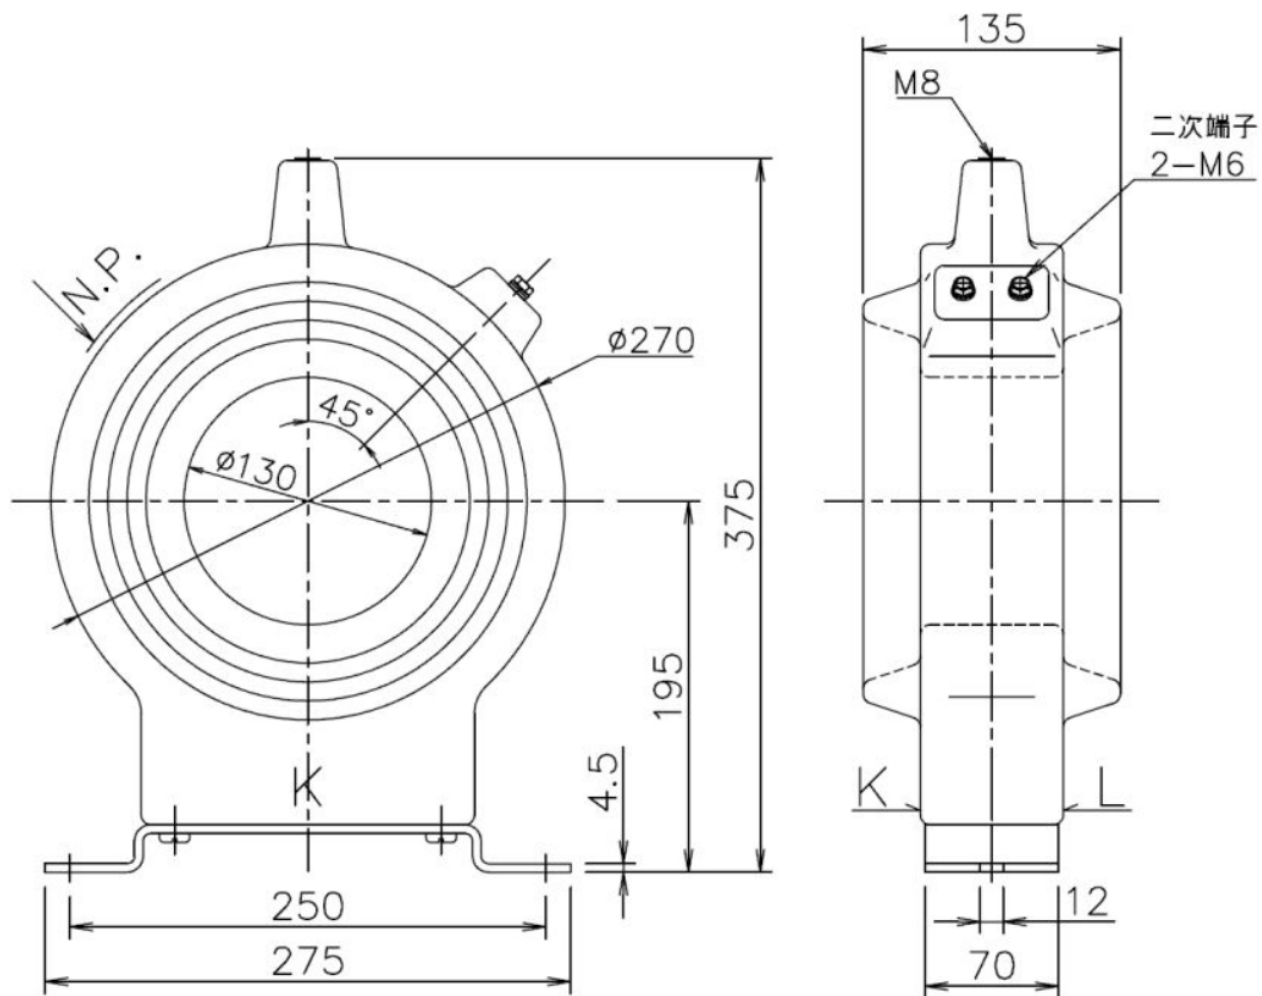

▲ E R - 5 0 1