

Round window type CT (17.5kV / 24kV)
EUT-10H / ER-356

- Cable / Busbar through type
- For Metering / Protection
- Indoor use




▲EUT-10H




▲ER-356


Type	Ratio	Rated output (VA)	Accuracy class	Insulation level (kV)	Short time current	Frequency	Max.Mass	Applicable standard of production	
								IEC-185	IEC 60044- 1 IEC 61869- 2
EUT-10H	2000 ~ 6000 / 5A, 1A	30	1.0 / 5P30	17.5 / 38 / 95	40kA · 1sec.	50Hz 60Hz	65kg	○	○
ER-356				24 / 50 / 125			115kg		

Short time current being subject to more than 25% rated burden connection at secondary side.

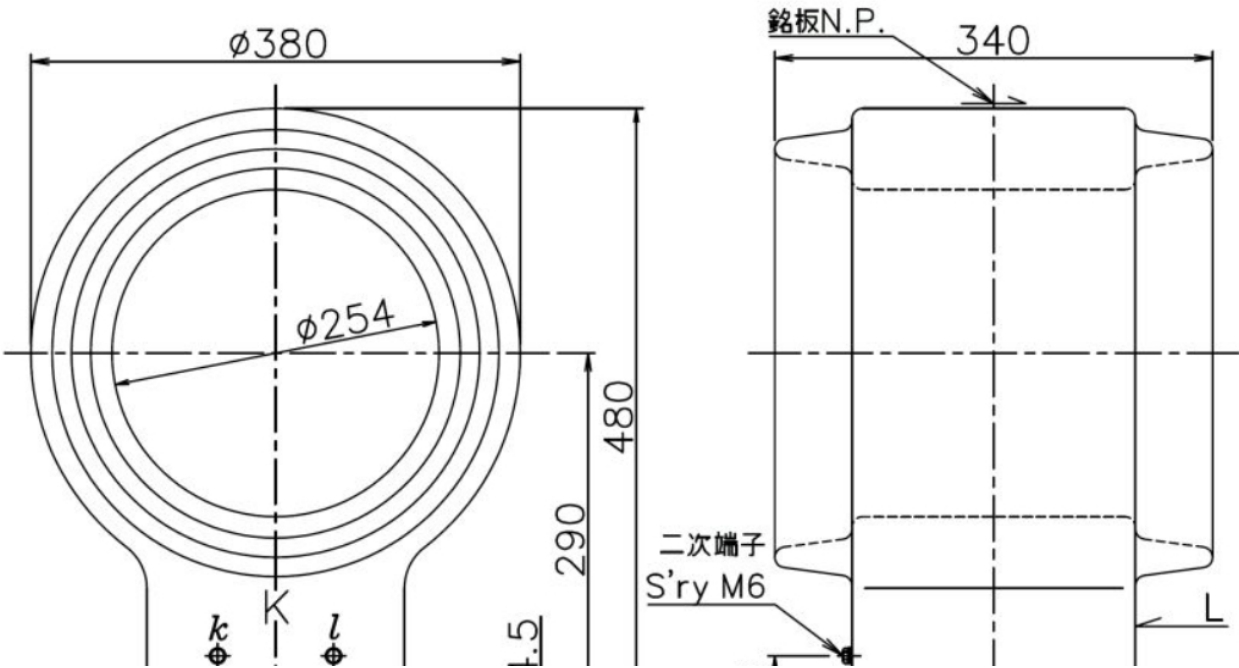

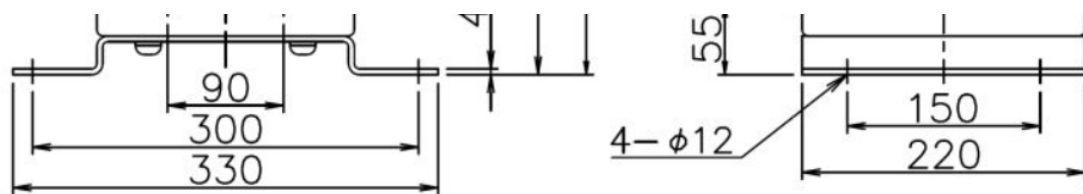

▲ E U T - 1 0 H

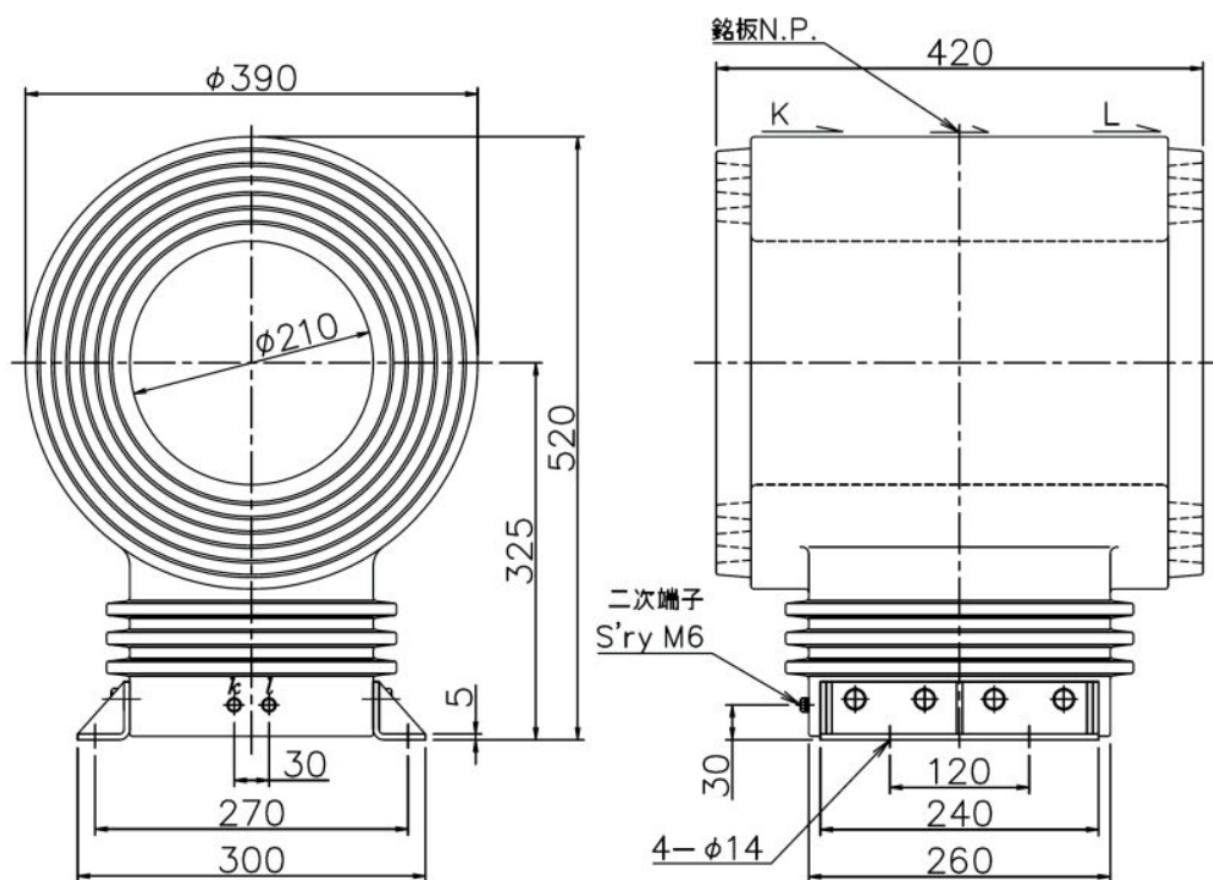

▲ E R - 3 5 6