

RISHOCAST





Winding type CT (12kV) RC-39D / RC-338



- Winding type
- For metering / Protection
- Indoor use




Type	Ratio	Rated output (VA)	Accuracy class	Insulation level (kV)	Short time current	Frequency	Mass	Applicable standard of production	
								IEC-185	IEC 60044-1 IEC 61869-2
RC-39D	10 ~ 75 / 5A, 1A	30	1.0 / 5P10	12 / 28 / 75	500 times	50Hz 60Hz	35kg	○	○
	100 ~ 1500 / 5A, 1A				40kA · 1sec.				
RC-338	10 ~ 50 / 5A, 1A				800 times		55kg		

Short time current being subject to more than 25% rated burden connection at secondary side.

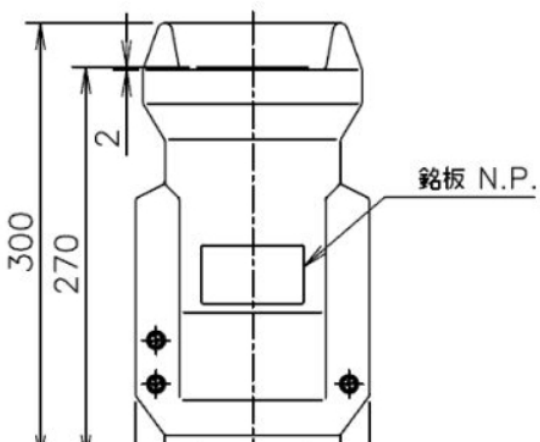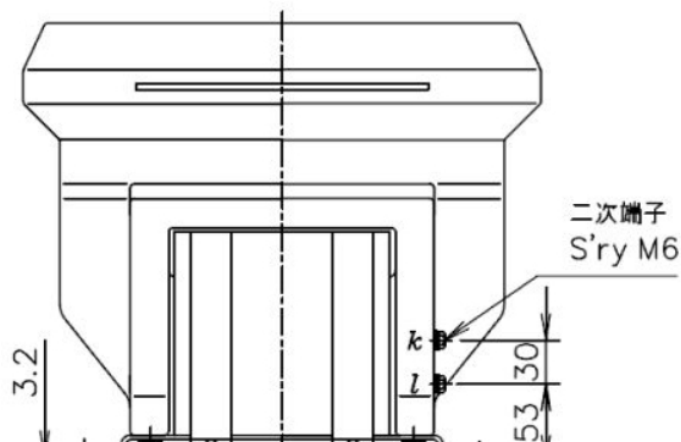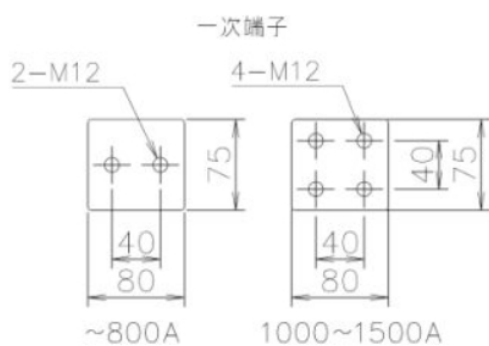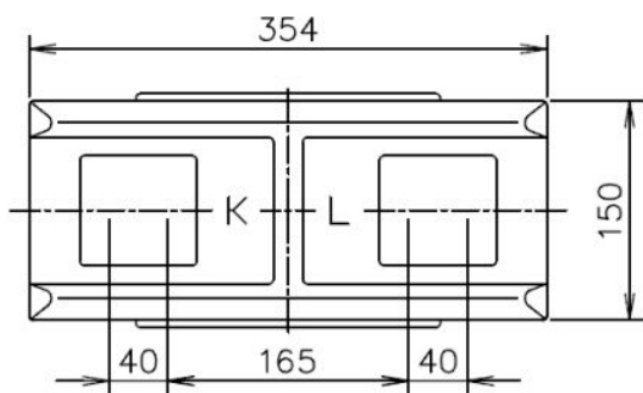

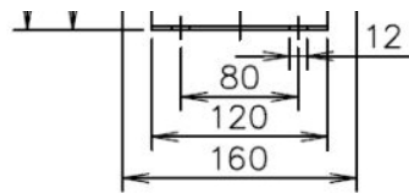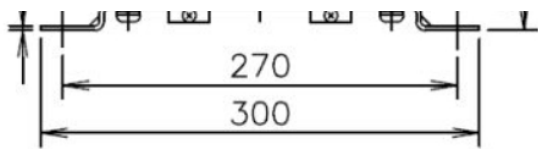

▲ RC-39D

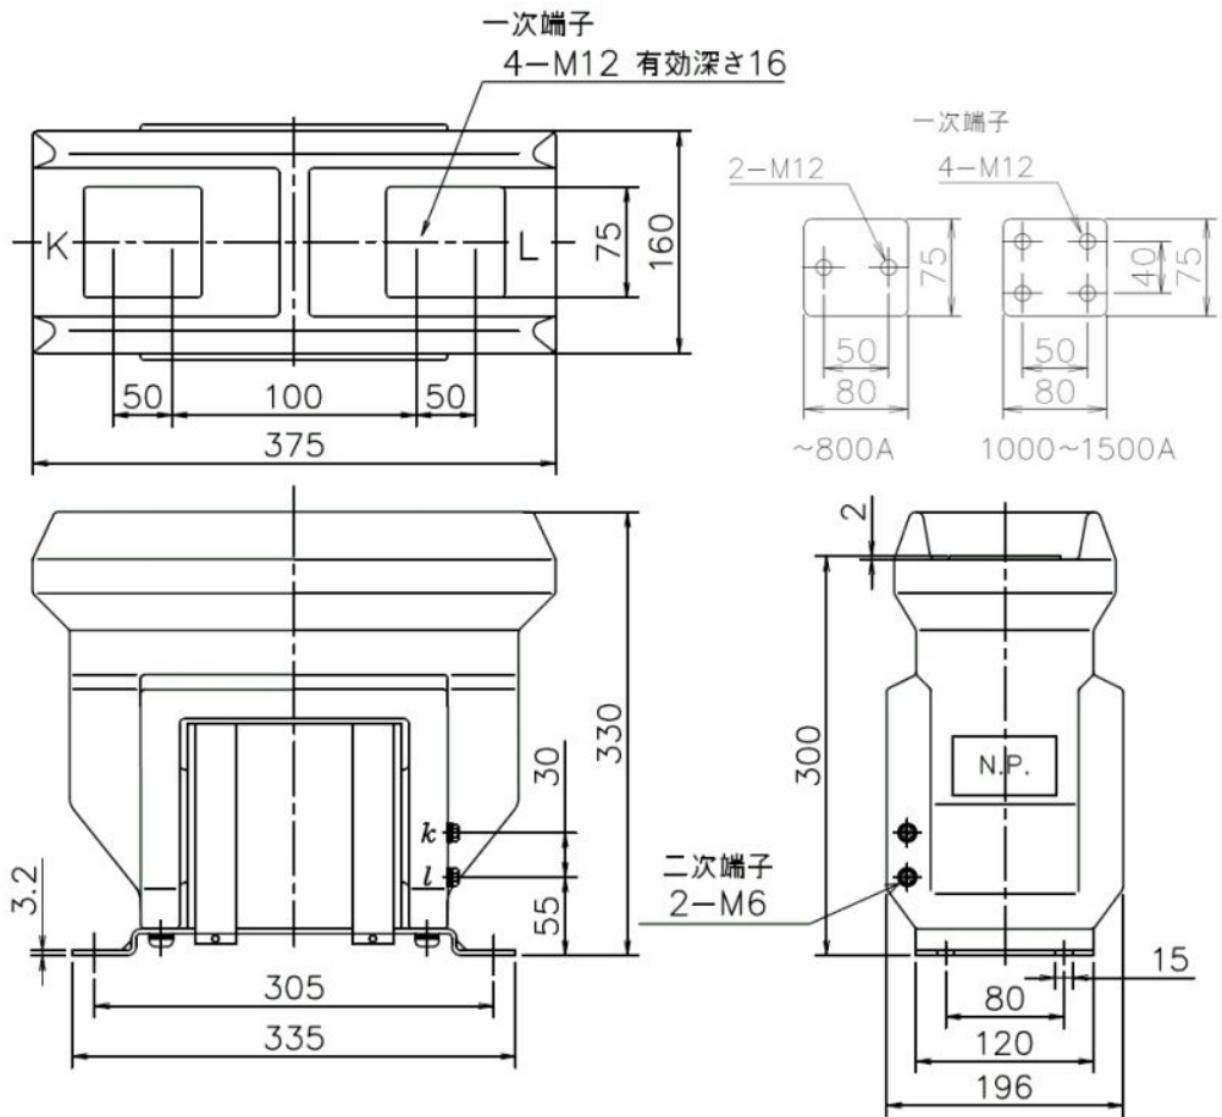

▲ RC-338