

Winding type CT (17.5kV / 24kV) RC-52D / RC-52DN

- Winding type
- For Metering / Protection
- Indoor use





▲RC-52D





▲RC-52DN





Type	Ratio	Rated output (VA)	Accuracy class	Insulation level (kV)	Short time current	Frequency	Mass	Applicable standard of production			
								IEC-185	IEC 60044-1 IEC 61869-2		
RC-52D	5 ~ 75 / 5A, 1A	30	1.0 / 5P10	17.5 / 38 / 95	500 times	50Hz 60Hz	45kg	○	○		
	100 ~ 1500 / 5A, 1A				40kA · 1sec.						
RC-52DN	5 ~ 75 / 5A, 1A			24 / 50 / 125	500 times		47kg				
	100 ~ 1500 / 5A, 1A				40kA · 1sec.						

Short time current being subject to more than 25% rated burden connection at secondary side.

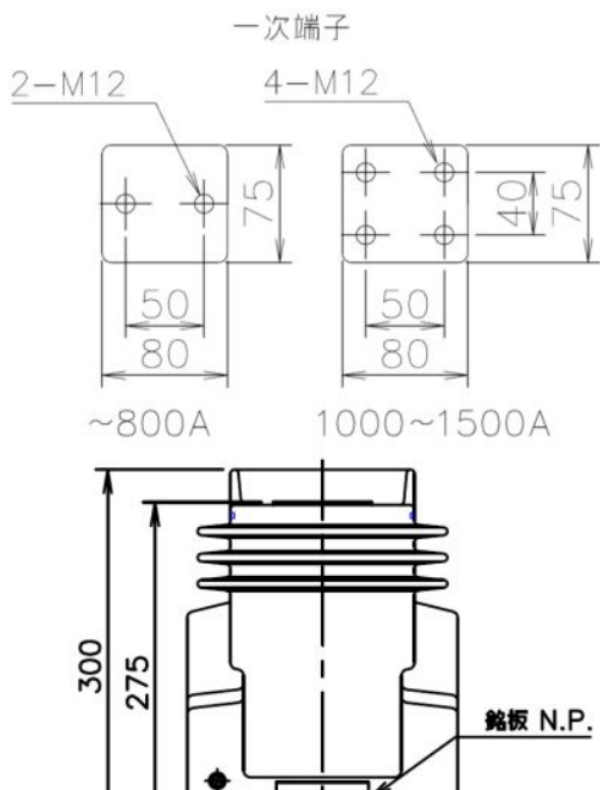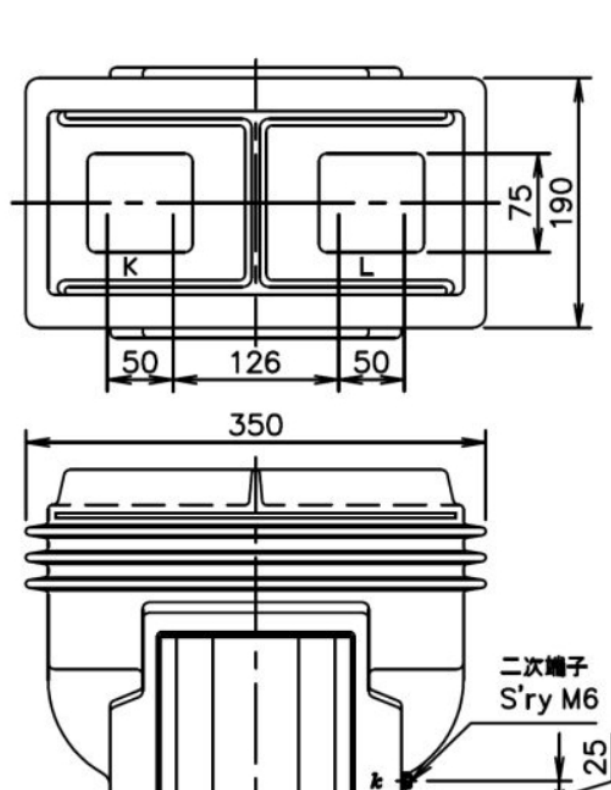

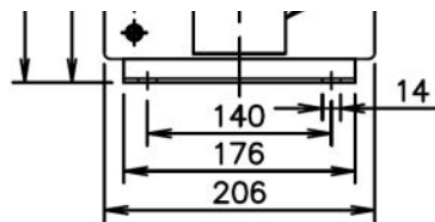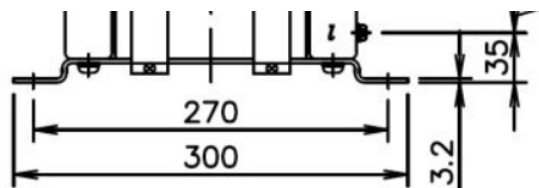

▲ RC-52D

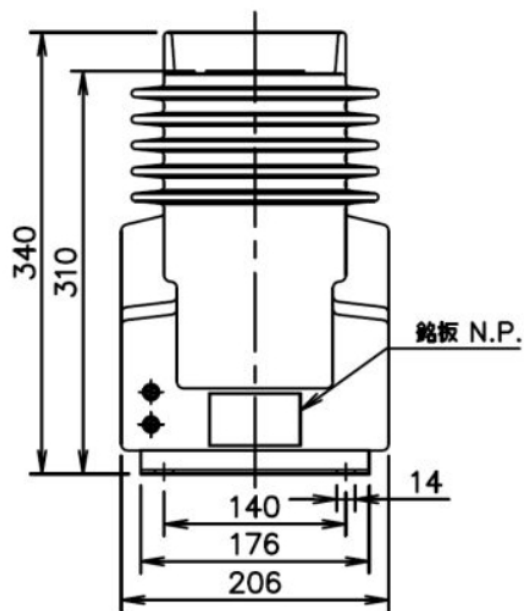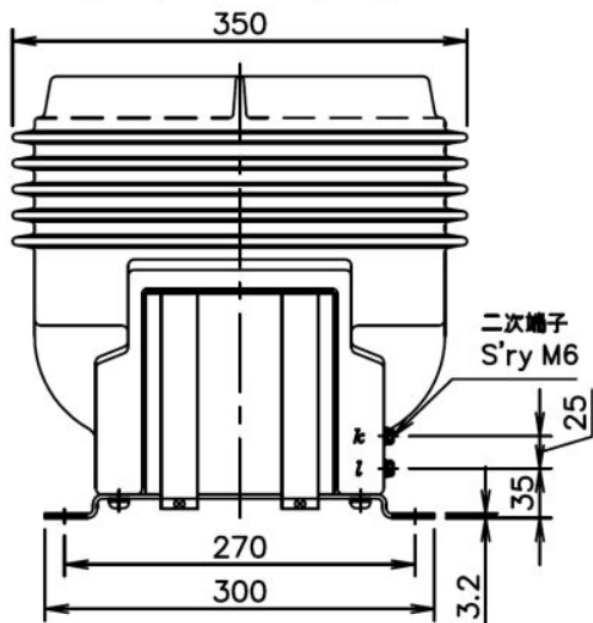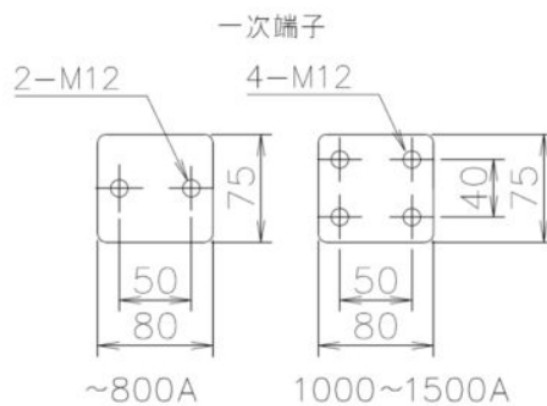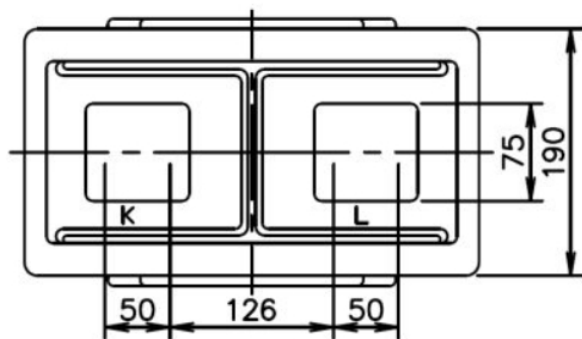

▲ RC-52DN