

Winding type CT (24kV / 36kV) RC-312 / RC-334

- Winding type
- For Metering / Protection
- Indoor use







▲RC-312




▲RC-334


Type	Ratio	Rated output (VA)	Accuracy class	Insulation level (kV)	Short time current	Frequency	Mass	Applicable standard of production	
								IEC-185	IEC 60044-1 IEC 61869-2
RC-312	10 ~ 50 / 5A, 1A	30	1.0 / 5P10	24 / 50 / 125	500 times	50Hz 60Hz	36kg	○	○
	75 ~ 1500 / 5A, 1A				25kA · 1sec.				
RC-334	20 ~ 50 / 5A, 1A			36 / 70 / 170	500 times		68kg		—
	75 ~ 1200 / 5A, 1A				25kA · 1sec.				

Short time current being subject to more than 25% rated burden connection at secondary side.

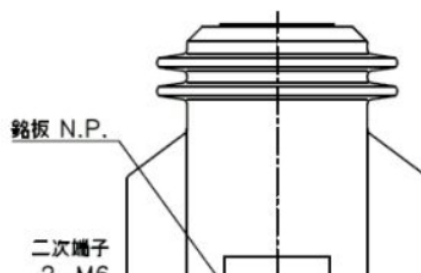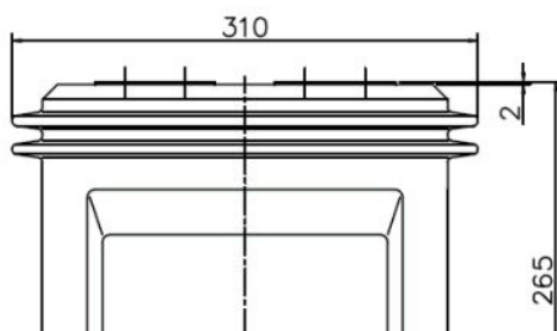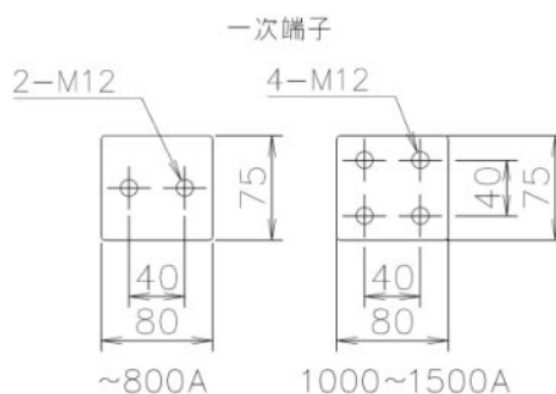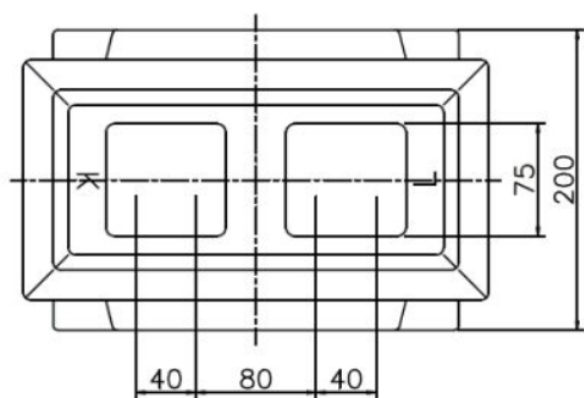

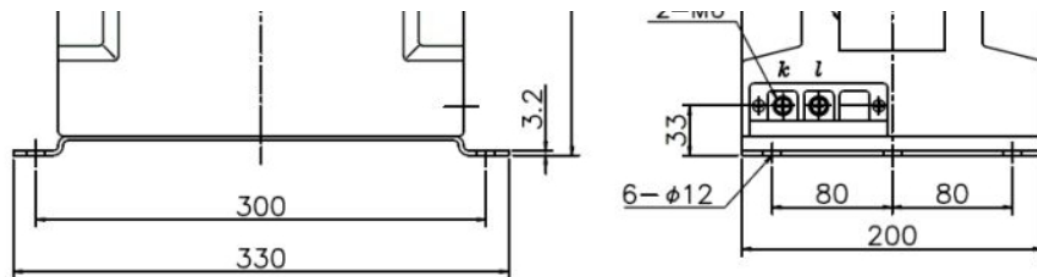

▲ RC-312

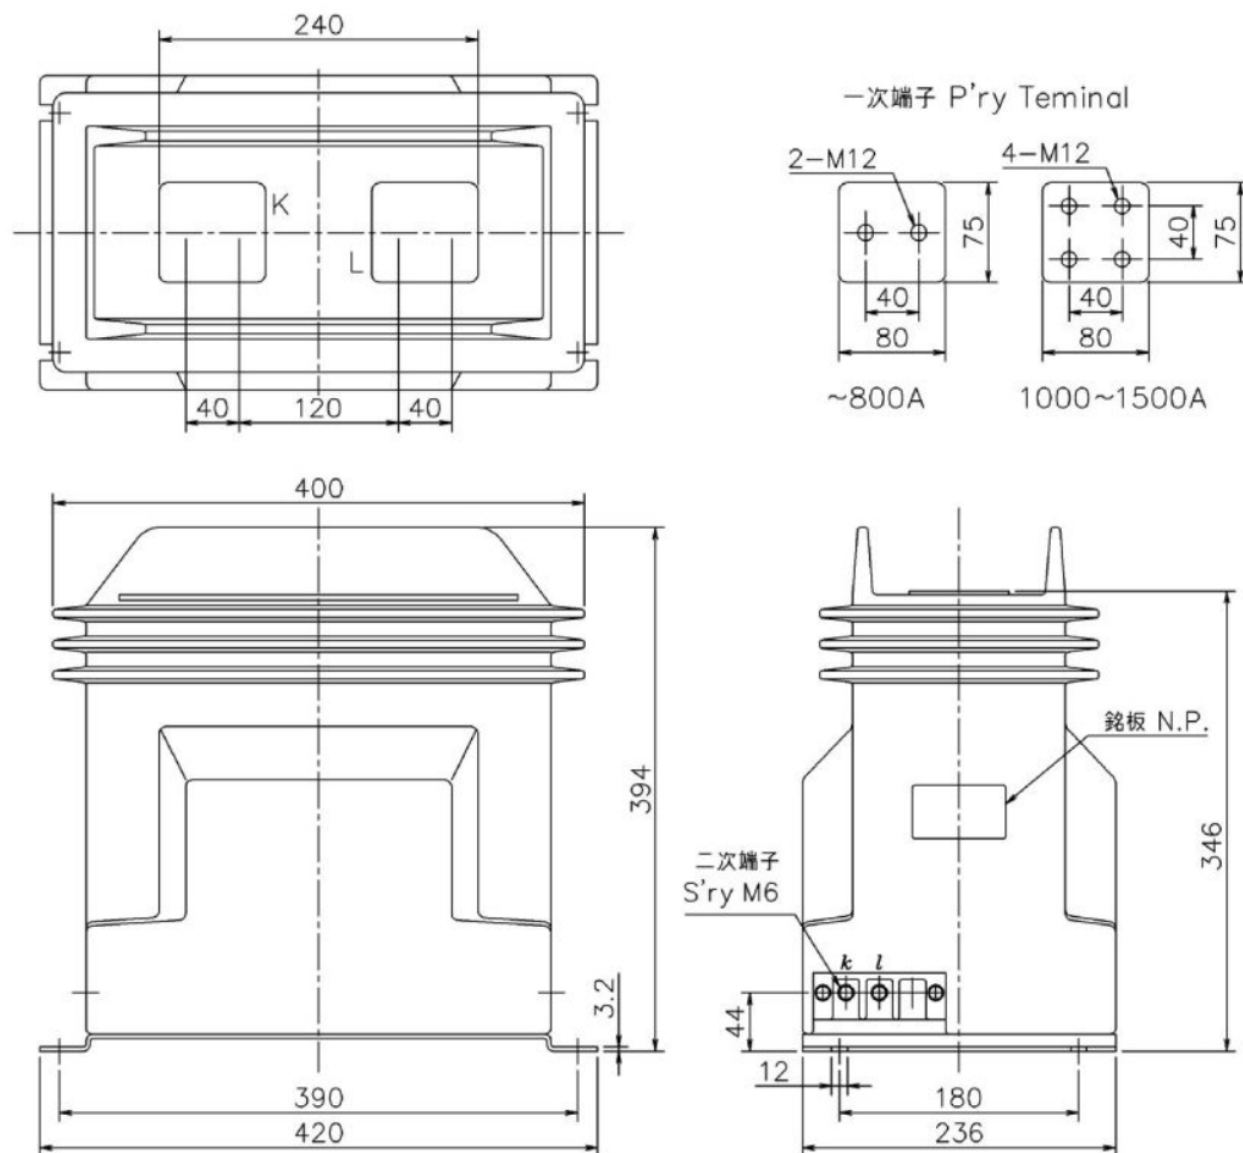

▲ RC-334