

Winding type CT (7.2kV)

EUH-60-CR / EUH-61-CR

- Winding type
- For Metering / Protection
- Indoor use




▲ EUH-60-CR




▲ EUH-61-CR


Type	Ratio	Rated output (VA)	Accuracy class	Insulation level (kV)	Short time current	Frequency	Mass	Applicable standard of production	
								IEC-185	IEC 60044-1 IEC 61869-2
EUH-60-CR	5 ∼ 300 / 5A , 1A	30	1.0	7.2 / 20 / 60	75 times	50Hz 60Hz	10kg	○	○
		15	1.0 / 5P10						
EUH-61-CR	5 ∼ 200 / 5A , 1A	30	1.0		150 times		14kg		
		15	1.0 / 5P10						
	300 ∼ 600 / 5A , 1A	30	1.0		40kA ・ 1sec.				
		15	1.0 / 5P10						

Short time current being subject to more than 25% rated burden connection at secondary side.

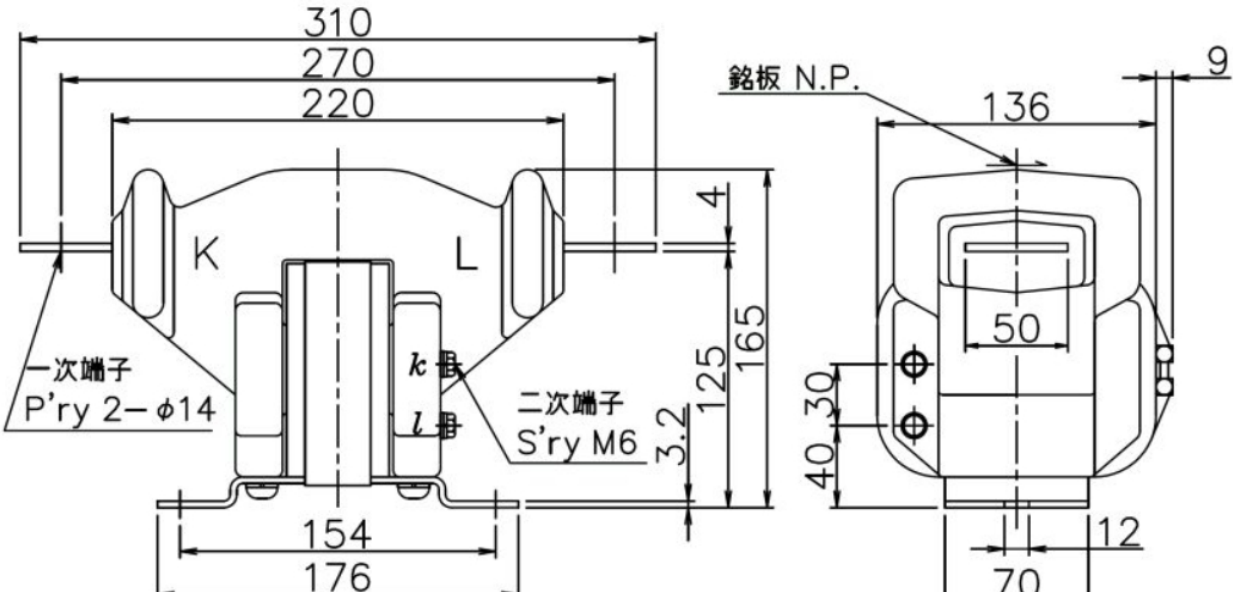

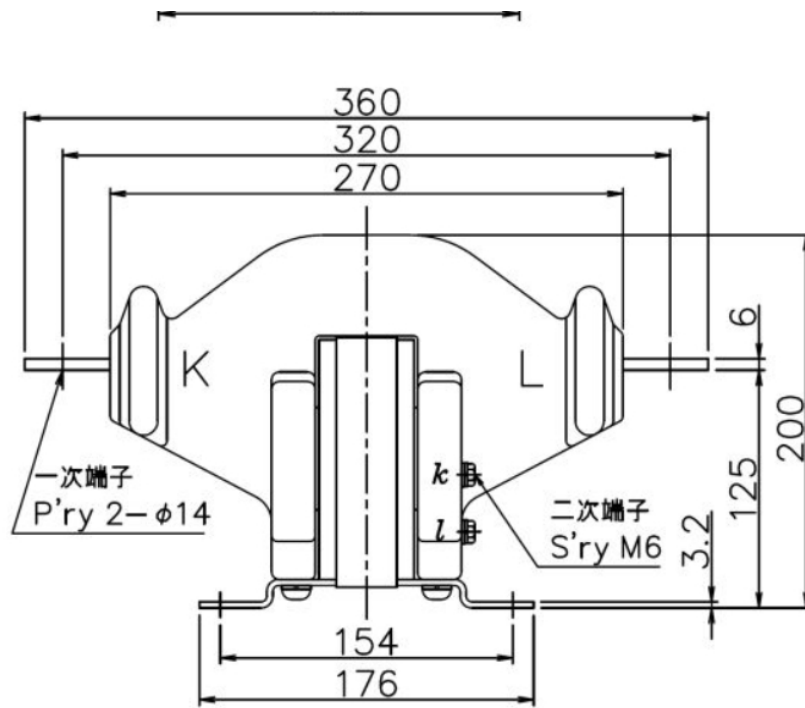

▲ E U H - 6 0 - C R

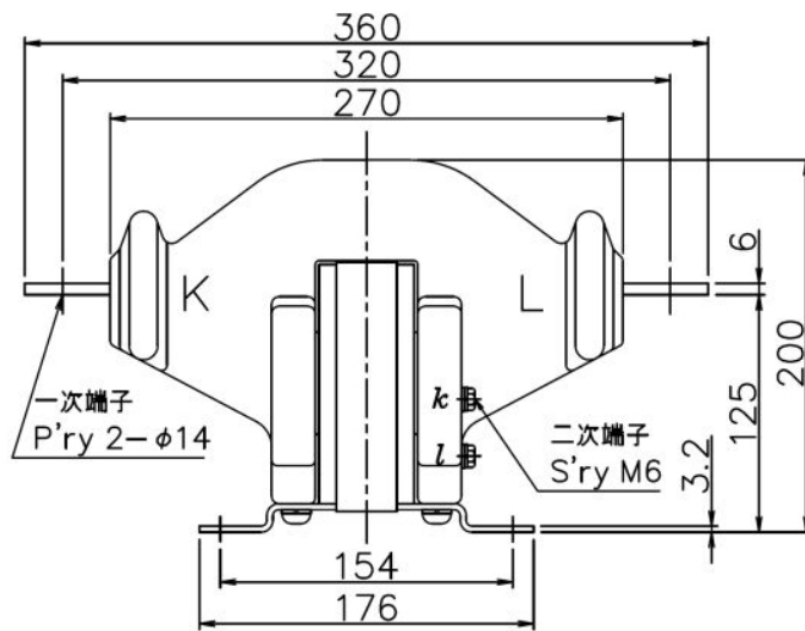

▲ E U H - 6 1 - C R