

Winding type CT (7.2kV)


EUH-63-CR / EUH-65-CR


- Winding type
- For Metering / Protection
- Indoor use




Type	Ratio	Rated output (VA)	Accuracy class	Insulation level (kV)	Short time current	Frequency	Mass	Applicable standard of production	
								IEC-185	IEC 60044-1 IEC 61869-2
EUH-63-CR	5 ~ 100 / 5A , 1A	30	1.0 / 5P10	7.2 / 20 / 60	300 times	50Hz 60Hz	21kg	○	○
	150 ~ 400 / 5A , 1A				40kA ・ 1sec.				
EUH-65-CR	5 ~ 75 / 5A , 1A	30	1.0/5P5		500 times				
		15	1.0/5P15						
	100 ~200 / 5A , 1A	30	1.0/5P5		40kA ・ 1sec.				
		15	1.0/5P15						
	300 ~400 / 5A , 1A	30	1.0/5P5						
		15	1.0/5P15						
	500 ~1500 / 5A , 1A	30	1.0/5P10						
		15	1.0/5P20						

Short time current being subject to more than 25% rated burden connection at secondary side.

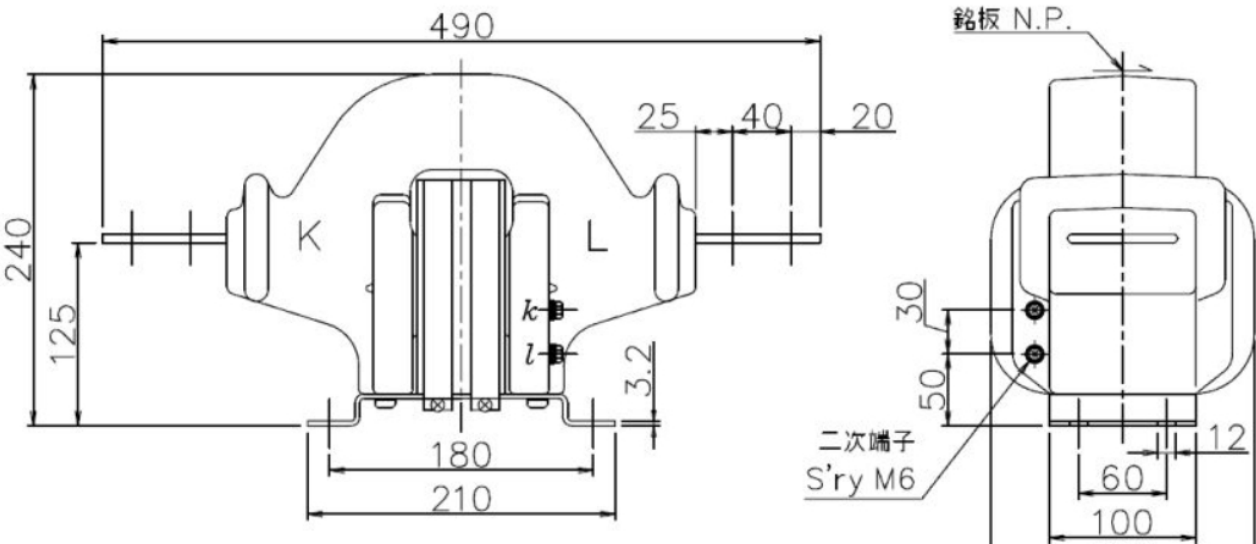

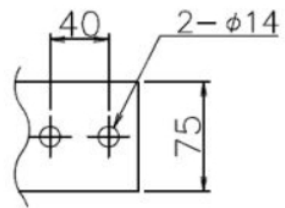

一次端子 P'ry Terminal
~1000A
端子厚さ 6mm

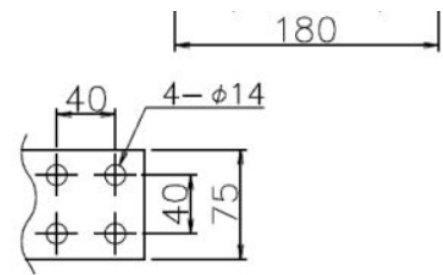

一次端子 P'ry Terminal
1200~1500A
端子厚さ 10mm